


### INTRODUCTION:

Adam Tech EMI filtered D-Sub option includes the addition of a high performance Ferrite Filter which surrounds each contact and provides a low cost EMI answer for high frequency interference. Our ferrite filtered D-Subs are direct drop-in replacements with our standard unfiltered D-Subs with the same footprint.

### FEATURES:

Direct replacement for standard non-filtered parts  
Low cost alternative to passive component types  
Significant reduction of noise at high frequencies

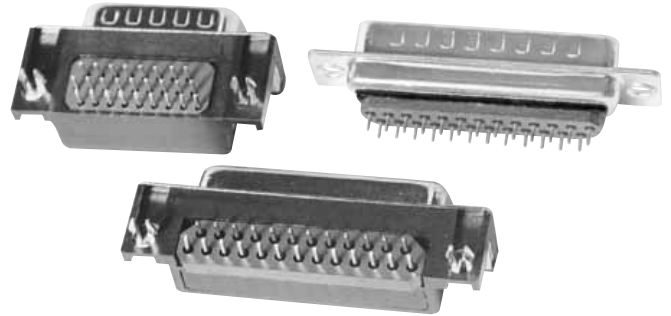


See pgs. 75, 78, 92, 98, 104, 106, 108 for ordering information

AdamTech offers a complete range of ferrite filtered D-Subs to satisfy EMI/RFI emissions in most applications. This series offers filtered connectors in a multitude of terminations, mating and mounting options.

- Drop in replacement for standard D-Subs
- Low applied cost
- Significant reduction of noise at high frequencies

Typical Performance

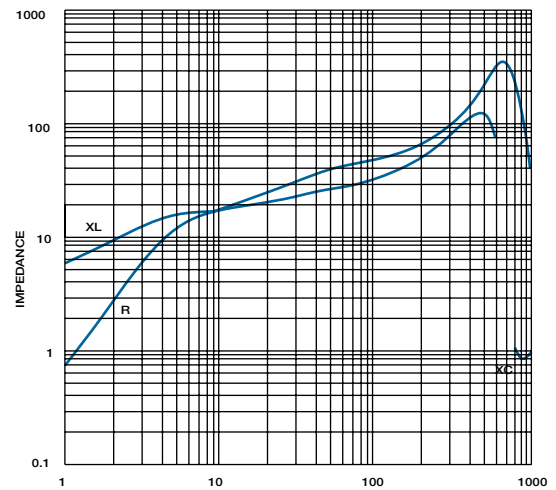

\* Consult factory for specific part number impedance performance.

FREQ (MHZ)

|     | 1     | 5  | 10 | 25 | 30 | 40 | 50 | 100 | 200 |
|-----|-------|----|----|----|----|----|----|-----|-----|
| XC- |       |    |    |    |    |    |    |     |     |
| XL- | 5.4   | 15 | 18 | 23 | 25 | 26 | 28 | 34  | 51  |
| R-  | 0.656 | 11 | 18 | 29 | 32 | 37 | 40 | 50  | 64  |

|     | 300 | 400 | 500 | 600 | 700  | 800   | 900   | 1000  |
|-----|-----|-----|-----|-----|------|-------|-------|-------|
| XC- |     |     |     |     | 1.27 | 0.807 | 0.856 | 0.977 |
| XL- | 73  | 101 | 122 | 57  |      |       |       |       |
| R-  | 84  | 121 | 199 | 342 | 344  | 170   | 77    | 40    |

25 Position

FREQ (MHZ)

|     | 1     | 5   | 10 | 25 | 30 | 40 | 50 | 100 | 200 |
|-----|-------|-----|----|----|----|----|----|-----|-----|
| XC- |       |     |    |    |    |    |    |     |     |
| XL- | 4     | 14  | 18 | 22 | 24 | 26 | 27 | 35  | 55  |
| R-  | 0.309 | 8.4 | 15 | 26 | 29 | 33 | 36 | 46  | 59  |

|     | 300 | 400 | 500 | 600 | 700   | 800   | 900   | 1000  |
|-----|-----|-----|-----|-----|-------|-------|-------|-------|
| XC- |     |     |     |     | 0.983 | 0.762 | 0.851 | 0.986 |
| XL- | 81  | 115 | 147 | 65  |       |       |       |       |
| R-  | 79  | 119 | 210 | 394 | 356   | 150   | 65    | 34    |

FREQ (MHZ)

|     | 1     | 5    | 10 | 25 | 30 | 40 | 50 | 100 | 200 |
|-----|-------|------|----|----|----|----|----|-----|-----|
| XC- |       |      |    |    |    |    |    |     |     |
| XL- | 3.6   | 15.9 | 19 | 24 | 25 | 27 | 28 | 36  | 54  |
| R-  | 0.116 | 8.4  | 16 | 28 | 31 | 35 | 39 | 49  | 62  |

|     | 300 | 400 | 500 | 600 | 700   | 800  | 900   | 1000  |
|-----|-----|-----|-----|-----|-------|------|-------|-------|
| XC- |     |     |     |     | 0.998 | 0.78 | 0.864 | 0.996 |
| XL- | 80  | 112 | 138 | 48  |       |      |       |       |
| R-  | 83  | 124 | 215 | 389 | 339   | 147  | 64    | 33    |

37 Position

FREQ (MHZ)

|     | 1    | 5   | 10 | 25 | 30 | 40 | 50 | 100 | 200 |
|-----|------|-----|----|----|----|----|----|-----|-----|
| XC- |      |     |    |    |    |    |    |     |     |
| XL- | 4.9  | 16  | 20 | 25 | 27 | 28 | 30 | 36  | 53  |
| R-  | 0.45 | 8.4 | 15 | 26 | 29 | 33 | 36 | 46  | 59  |

|     | 300 | 400 | 500 | 600 | 700   | 800   | 900   | 1000 |
|-----|-----|-----|-----|-----|-------|-------|-------|------|
| XC- |     |     |     |     | 1.082 | 0.814 | 0.879 | 1    |
| XL- | 76  | 105 | 122 | 29  |       |       |       |      |
| R-  | 80  | 122 | 224 | 424 | 332   | 131   | 56    | 29   |