


RPM SERIES

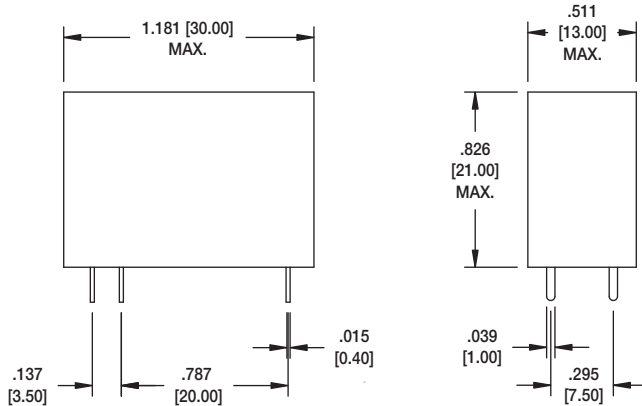

RPM-1A-P-12

RPM-1A-P-XX	RPM-1C-P-XX	RPM-2A-P-XX	RPM-2C-P-XX
<p>Recommended PCB Layout 1 Form A</p>	<p>Recommended PCB Layout 1 Form C</p>	<p>Recommended PCB Layout 2 Form A</p>	<p>Recommended PCB Layout 2 Form C</p>
<p>Schematic 1 Form A</p>	<p>Schematic 1 Form C</p>	<p>Schematic 2 Form A</p>	<p>Schematic 2 Form C</p>

Nominal Voltage V DC	Pick-up Voltage V DC (max.)	Drop-out Voltage V DC (min.)	Nominal Operating Current mA (±10%)	Coil Resistance (±10%)	Nominal Operating Power mW	Max allowable Voltage V DC
5	3.5	0.5	106	47	530	130%V of nominal Voltage @ 60 C
6	4.2	0.6	88	68		
9	6.3	0.9	58	155		
12	8.4	1.2	44	270		
24	16.8	2.4	22	1,100		
						120%V of nominal Voltage @ 85 C