


MALE HEADER



ORDERING INFORMATION

HSH **50** **G**



SERIES INDICATOR
HSH = .050" Shrouded header

PLATING
G = Gold plated
T = Tin plated
SG = Gold plating in contact area, tin plated solder tails


TOTAL POSITIONS
10 thru 100

OPTIONS:

SMT = Surface mount leads with Hi-Temp insulator
P = Peg option (thru hole only)

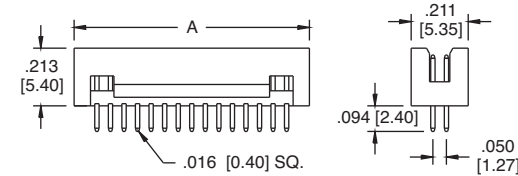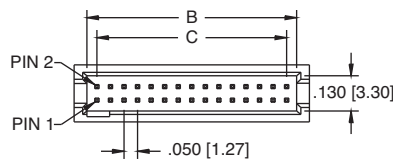



Recommended PCB Layout




Standard: With key & without peg

A = .050 X No. of Spaces + .168 [4.27]
B = .050 X No. of Spaces + .074 [1.87]
C = .050 X No. of Spaces

HSH SERIES
SHROUDED MALE HEADER

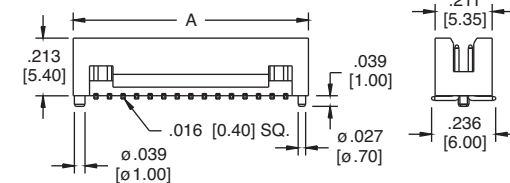

Recommended PCB Layout

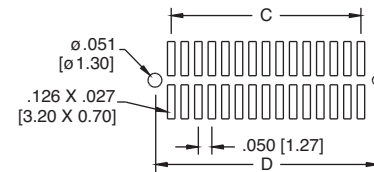


Standard: With key & with peg

A = .050 X No. of Spaces + .168 [4.27]
B = .050 X No. of Spaces + .074 [1.87]
C = .050 X No. of Spaces
D = .050 X No. of Spaces + .120 [3.05]

HSH-SMT SERIES
SHROUDED MALE HEADER

FEMALE HEADER



ORDERING INFORMATION

HFH **50** **G**


SERIES INDICATOR
HFH = .050" Female header

PLATING
G = Gold plated
T = Tin plated
SG = Gold plating in contact area, tin plated solder tails


TOTAL POSITIONS
10 thru 100

OPTIONS:

SMT = Surface mount leads with Hi-Temp insulator
NP = No peg
NK = No Key
P = Peg option (thru hole only)

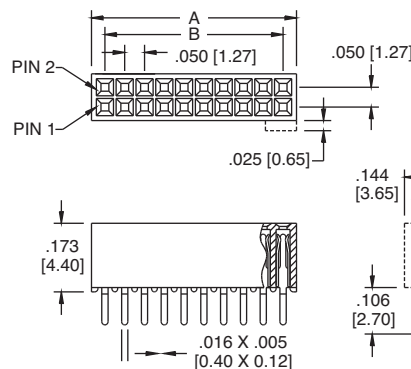



Recommended PCB Layout




Standard: With key & without peg

A = .050 X No. of Spaces + .068 [1.73]
B = .050 X No. of Spaces
C = .050 X No. of Spaces + .120 [3.05]

HFH SERIES
SHROUDED FEMALE HEADER

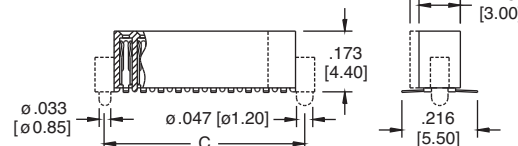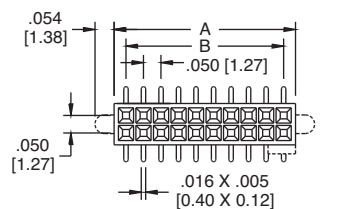

Recommended PCB Layout

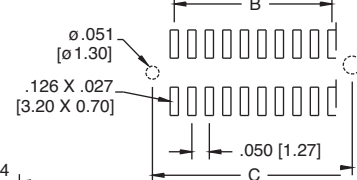

Standard: With key & with peg

A = .050 X No. of Spaces + .068 [1.73]
B = .050 X No. of Spaces
C = .050 X No. of Spaces + .120 [3.05]

HFH-SMT SERIES
SHROUDED FEMALE HEADER