

A = .100" [2.54] x No. of positions
B = .100" [2.54] x No. of spaces

RSE1

RSE1-3-20-SG-3

Recommended PCB Layout

A = .100" [2.54] x No. of positions per row
B = .100" [2.54] x No. of spaces

RSE2

RSE2-3-40-SG-3

Recommended PCB Layout

ORDERING INFORMATION




SERIES INDICATOR
RSE1 = Single row, vertical elevated socket strip
RSE2 = Dual row, vertical elevated socket strip

POSITIONS
Single Row
 01 thru 40
Dual Row
 02 thru 80

PIN LENGTH
Dim. D
 See chart Dim.D

PLATING
SG = Selective Gold
 Plating in contact area, Tin Plated tails
T = Tin Plated

HEIGHT
 1 = .433 [11.00]
 2 = .531 [13.50]
 3 = .630 [16.00]

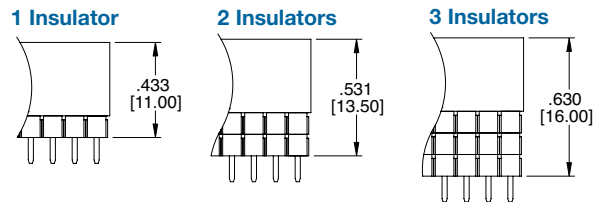

PART NUMBER	INSULATORS	DIM. C	DIM. D
RSEX-1-XX-SG-1	1	.433 [11.00]	.118 [3.00]
RSEX-1-XX-SG-2	1	.433 [11.00]	.315 [8.00]
RSEX-1-XX-SG-3	1	.433 [11.00]	.448 [11.40]
RSEX-2-XX-SG-1	2	.531 [13.50]	.216 [5.50]
RSEX-3-XX-SG-1	3	.635 [16.12]	.118 [3.00]
RSEX-3-XX-SG-2	3	.635 [16.12]	.252 [6.40]

*Replace "X" with "1" for single row or "2" for double row.
 *Replace "XX" with total number of positions.