

6

5

4




3

2

1

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/19/07	
A		REVISED COLOR	6/21/10	

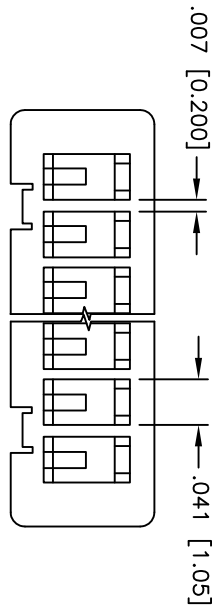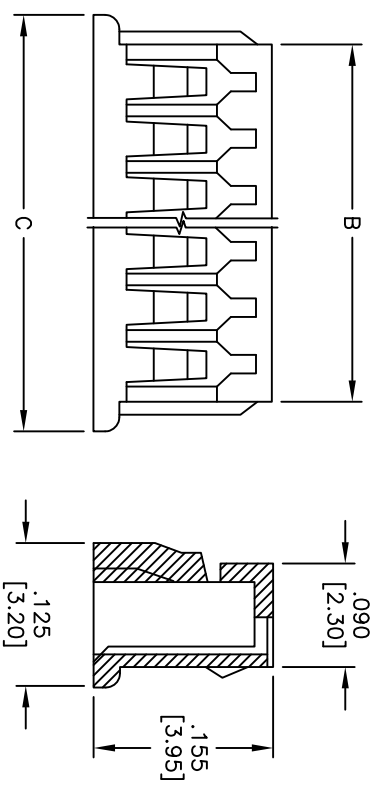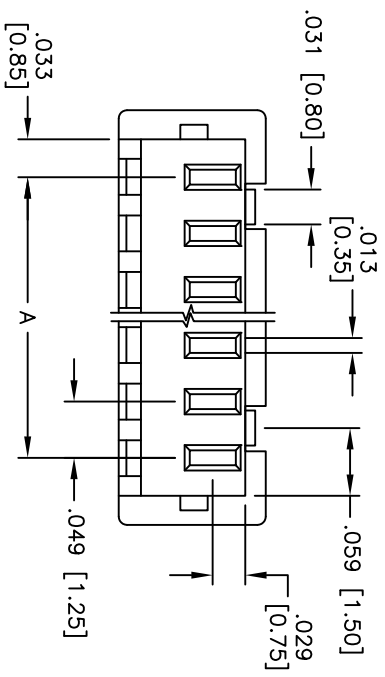

**SPECIFICATIONS:**

- Material: Insulator: Nylon 66, rated UL 94V-0
- Insulator color: White
- Electrical: Operating voltage: 250 VAC max
- Current rating: 1 Amp max
- Contact resistance: 20 mohms max.
- Insulation resistance: 1,000 Mohms min @ 500 VDC
- Dielectric withstanding voltage: 250 VAC for 1 minute
- Temperature Rating: Operating temperature: -40°C to +85°C
- Environmental: Lead free, RoHS compliant

A=.049 [1.25] X NO. OF SPACES +.066 [1.70]  
 B=.049 [1.25] X NO. OF SPACES +.118 [3.00]  
 C=.049 [1.25] X NO. OF SPACES

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS

DATE	DATE
	01/17/07

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 1.25mm HOUSING

DRAWN	CHECKED	APPROVED	SIZE	PART NO.	SCALE	SHEET	REV.
BW			X	125CH-B-XX	NTS	1 OF 1	A

6

5

4

3

2

1