


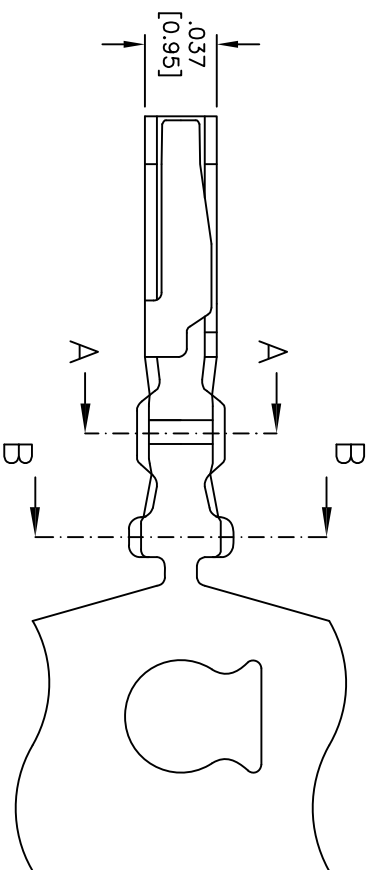


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/30/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_



SECTION A-A

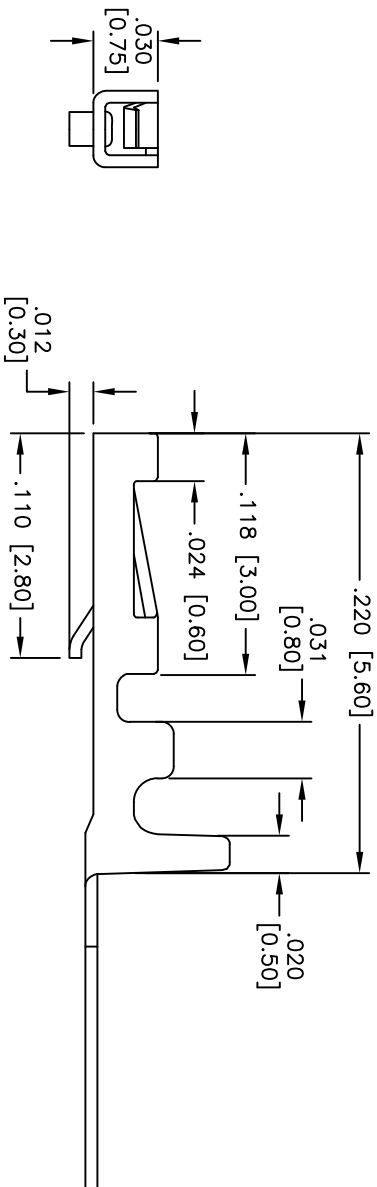

SECTION B-B

ADAM P/N	Wire range	Dim. a	Dim. b
125CTG-A-R	#30 ~ #32	.045 [1.15]	.047 [1.20]
125CTG-B-R	#28 ~ #30	.047 [1.20]	.053 [1.35]

**SPECIFICATIONS:**  
 Material: Phosphor Bronze  
 Plating: Gold Plated  
 Electrical:  
 Voltage rating: 100 VAC/DC max  
 Current rating: 1 Amp max  
 Contact Resistance: 20 mOhms Max.  
 Dielectric withstanding voltage: 250 VAC for 1 minute  
 Mechanical:  
 Wire Range: 28-32 AWG.  
**Temperature Rating:**  
 Operating temperature: -25°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES: .10 ± .020 ØXX ± .015  
 .XX ± .015  
 .XXX ± .015  
 APPROVALS: \_\_\_\_\_ DATE: \_\_\_\_\_

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710  
 TITLE: 1.25mm TERMINAL FOR 125CH-G  
 CRIMP HOUSING

DRAWN	AY	11/30/10	SIZE	PART NO.	125CTG-XR	REV.
CHECKED	AH	11/30/10	X			
APPROVED						

REF: S00123T SCALE: NTS SHEET 1 OF 1