
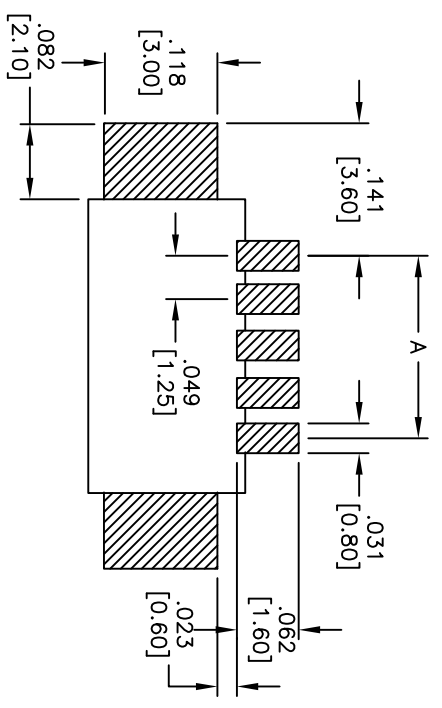
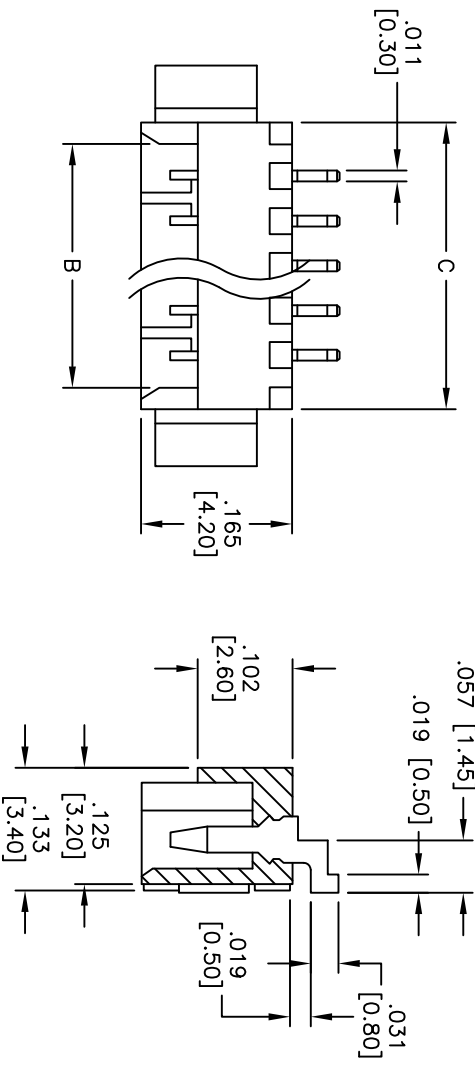


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/19/07	

APPROVED: _____
 DATE: _____ TITLE: _____

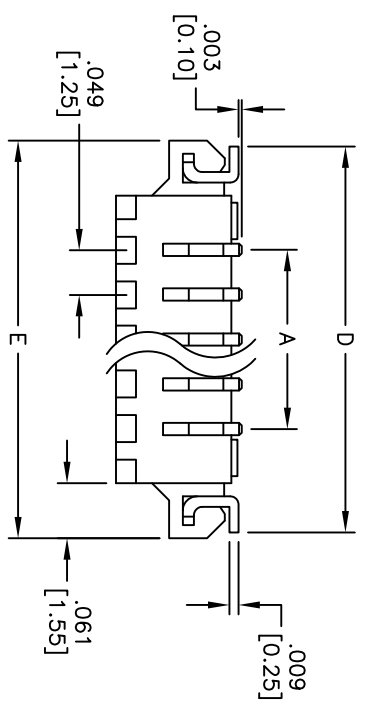

PACKAGED ON TAPE & REEL

- A=.049 [1.25] X NO. OF SPACES
- B=.049 [1.25] X NO. OF SPACES X+.070 [1.80]
- C=.049 [1.25] X NO. OF SPACES X+.118 [3.00]
- D=.049 [1.25] X NO. OF SPACES X+.236 [6.00]
- E=.049 [1.25] X NO. OF SPACES X+.251 [6.40]

SPECIFICATIONS:

Material: Nylon 46, rated UL 94V-0
 Insulator color: Ivory
 Contacts: Brass
Plating:
 Matt Tin over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max
 Current rating: 1 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 100 Mohms min
 Dielectric withstanding voltage: 250 VAC for 1 minute
Temperature Rating:
 Operating temperature: -40°C to +85°C
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 260°C. for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	
DRAWN	BW
CHECKED	
APPROVED	
	01/17/07

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MX 1.25mm WAFER 90° SMT

SIZE	PART NO.	REV.
X	12SSH-B-XX-MTR-SMT-T/R	-
REF:	SCALE: NTS	SHEET 1 OF 1