
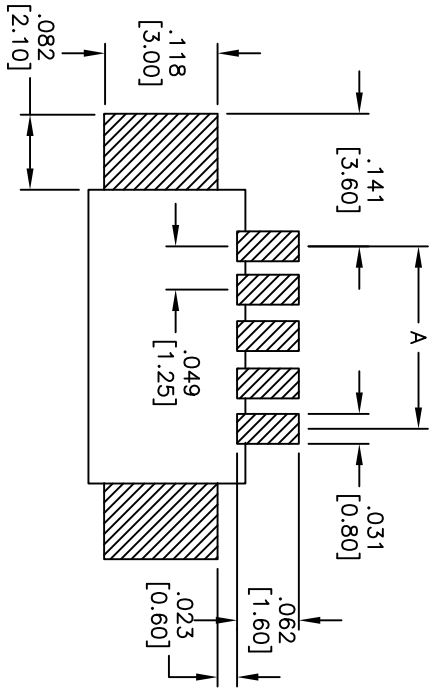
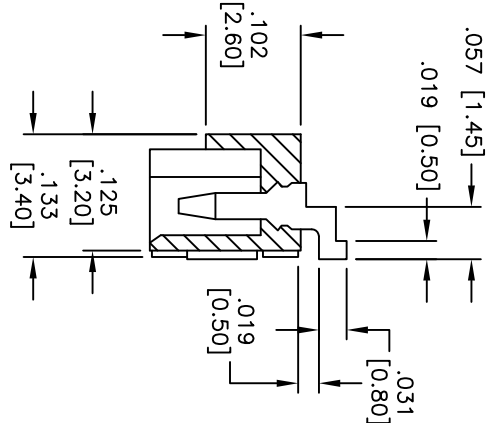
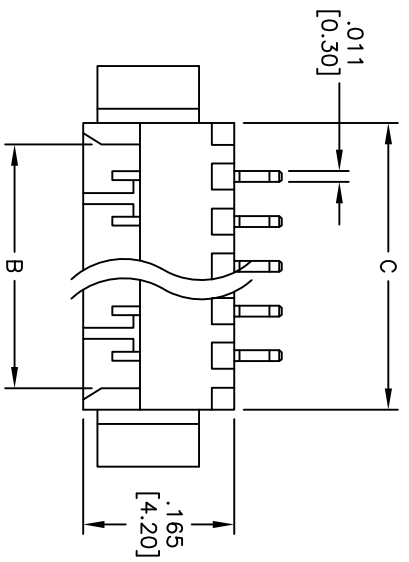


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/22/10	

APPROVED: _____
 DATE: _____ TITLE: _____

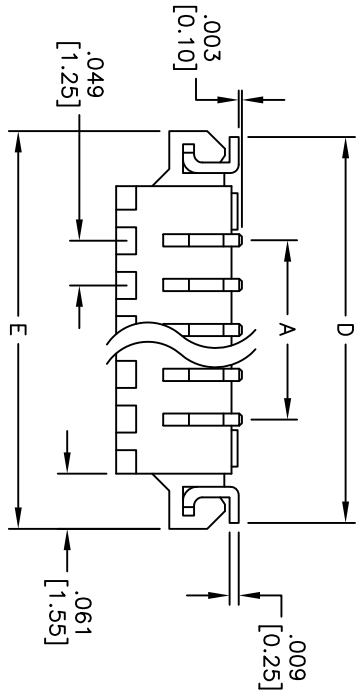

- A=.049 [1.25] X NO. OF SPACES
- B=.049 [1.25] X NO. OF SPACES X+.070 [1.80]
- C=.049 [1.25] X NO. OF SPACES X+.118 [3.00]
- D=.049 [1.25] X NO. OF SPACES X+.236 [6.00]
- E=.049 [1.25] X NO. OF SPACES X+.251 [6.40]

SPECIFICATIONS:

Material:
 Insulator: Nylon 46, rated UL 94V-0
 Insulator color: Ivory
 Contacts: Brass
Plating:
 Matte Tin over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max
 Current rating: 1 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 100 Mohms min
 Dielectric withstanding voltage: 250 VAC for 1 minute
Temperature Rating:
 Operating temperature: -40°C to +85°C
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 260°C. for 5 sec.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE IN INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES Holes ±.10
 .XX ±.020
 .XXX ±.015
 .XXX ±.010

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710
 TITLE: 1.25MM WIRE TO BOARD WAFER SMT
 SIDE ENTRY

APPROVALS	DATE	SIZE	PART NO.	SCALE	SHEET	REV.
DRAWN AY	12/22/10	X	12SSH-B-XX-MTR-SMT	NTS	1	-
CHECKED JL	12/22/10	X				
APPROVED						