
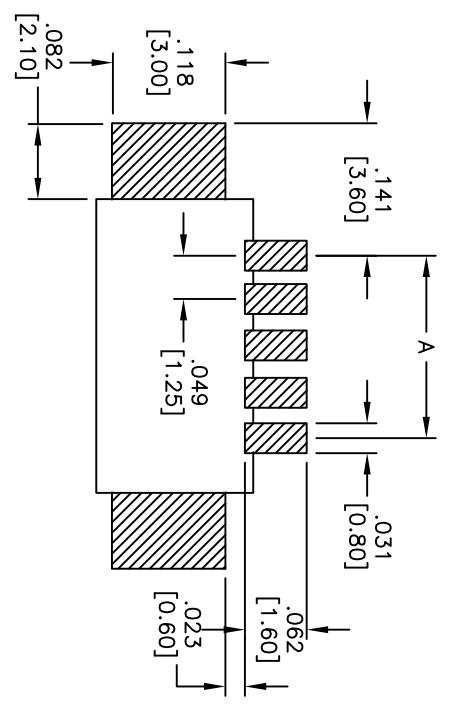
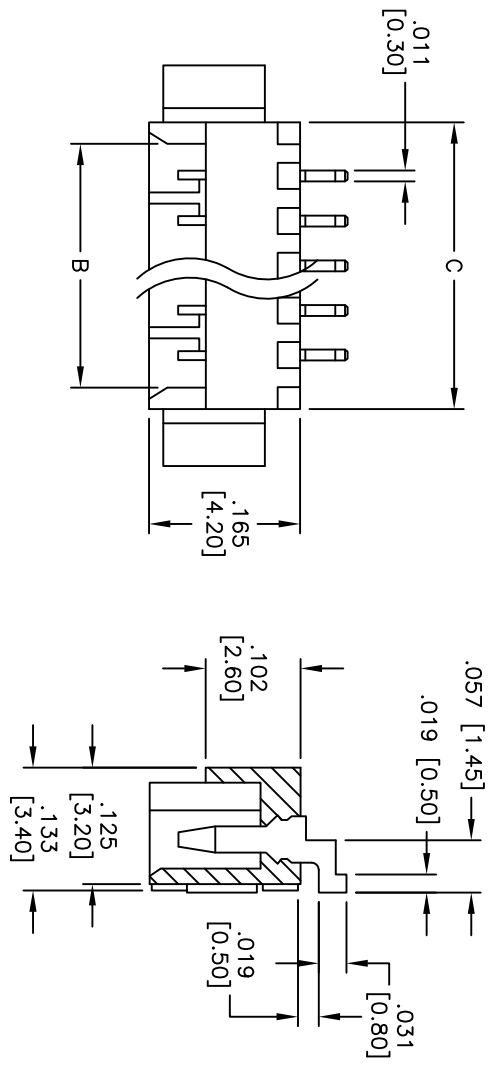


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/19/07	

APPROVED: _____
 DATE: _____ TITLE: _____

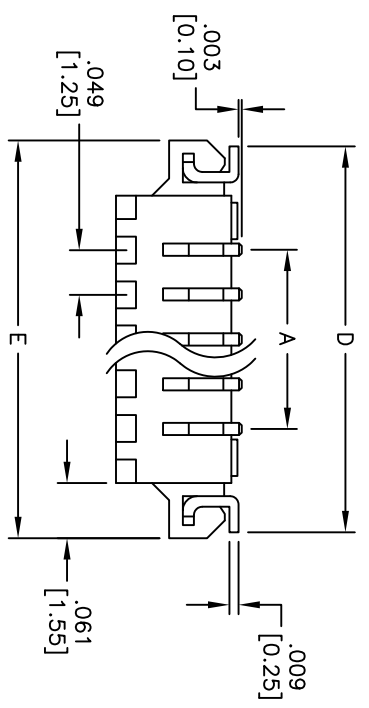

SPECIFICATIONS:
 Material: Nylon 46, rated UL 94V-0
 Insulator color: Ivory
 Contacts: Brass
Plating:
 Tin over Nickel underplate overall
Electrical:
 Operating voltage: 250 VAC max
 Current rating: 1 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 100 Mohms min
 Dielectric withstanding voltage: 250 VAC for 1 minute
Temperature Rating:
 Operating temperature: -40°C to +85°C
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 260°C. for 5 sec.

PACKAGED ON TAPE & REEL

A=.049 [1.25] X NO. OF SPACES
 B=.049 [1.25] X NO. OF SPACES X+.070 [1.80]
 C=.049 [1.25] X NO. OF SPACES X+.118 [3.00]
 D=.049 [1.25] X NO. OF SPACES X+.236 [6.00]
 E=.049 [1.25] X NO. OF SPACES X+.251 [6.40]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLE SIZES
 .X ±.10 ØXX ±.10
 .XX ±.020 ØXXX ±.015
 .XXX ±.015 ØXXXX ±.010

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MX 1.25mm WAFER 90° SMT

APPROVALS	DATE	SIZE	PART NO.	REV.
DRAWN	BW	01/17/07	12SSH-B-XX-TR-SMT-T/R	
CHECKED		X		
APPROVED		REF:	SCALE: NTS	SHEET 1 OF 1

