
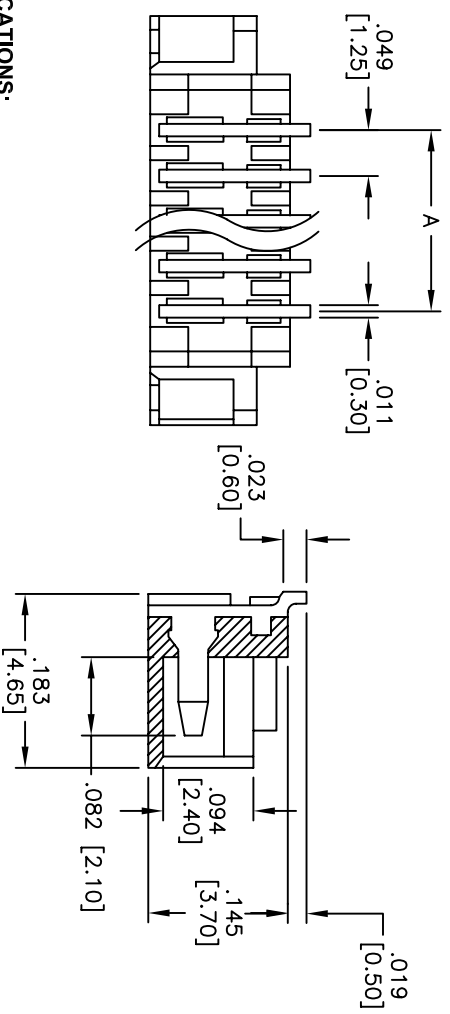
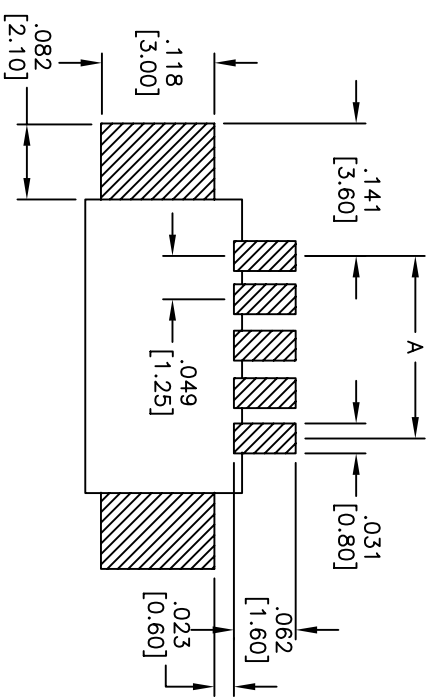


Rev	AWO #	Description	Date	Appr
-		RELEASED	01/17/07	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

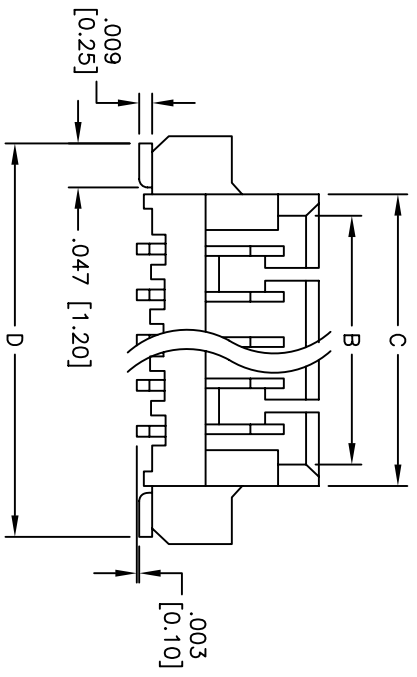

A = .049 [1.25] X NO. OF SPACES  
 B = .049 [1.25] X NO. OF SPACES X + .070 [1.80]  
 C = .049 [1.25] X NO. OF SPACES X + .118 [3.00]  
 D = .049 [1.25] X NO. OF SPACES X + .259 [6.60]

**SPECIFICATIONS:**

**Material:**  
 Insulator: Nylon 46, rated UL 94V-0  
 Insulator color: Ivory  
 Contacts: Brass  
**Plating:**  
 Tin over Nickel underplate overall

**Electrical:**  
 Operating voltage: 250 VAC max  
 Current rating: 1 Amps max  
 Contact resistance: 20 mohms max  
 Insulation resistance: 100 Mohms min  
 Dielectric withstanding voltage: 250 VAC for 1 minute  
**Temperature Rating:**  
 Operating temperature: -40°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 260°C. for 5 sec.

PACKAGING: SUPPLIED ON TAPE & REEL



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

MX 1.25mm WAFER 180° SMT  
 TAPE AND REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TITLE MX 1.25mm WAFER 180° SMT	
TOLERANCES: EXCEPT AS NOTED		PART NO. 125SH-B-XX-TS-SMT-TR	
INCHES		SIZE X	
HOLDS		SCALE: NTS	
.X ± .10	ØX ± .10	SHEET 1 OF 1	
.XX ± .020	ØXX ± .015		
.XXX ± .015	ØXXX ± .010		
APPROVALS		REV.	
DRAWN	BW	DATE 01/17/07	
CHECKED			
APPROVED			