
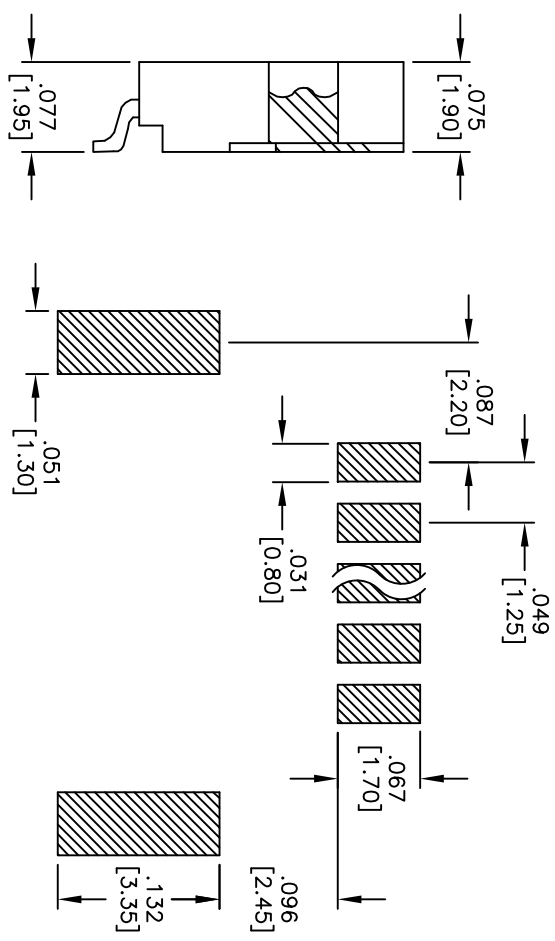
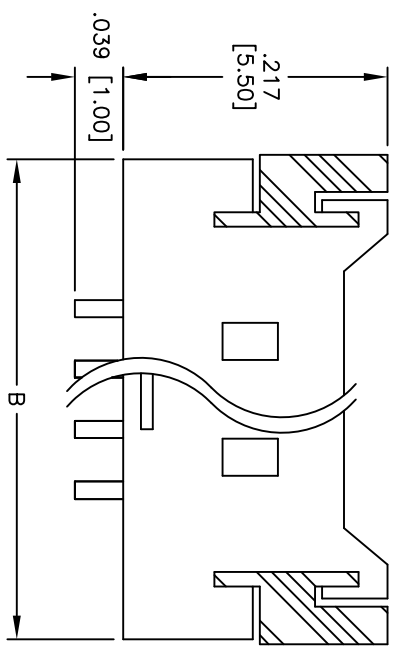


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/27/10	

6 5 4 3 2 1

APPROVED: _____

DATE: _____ TITLE: _____

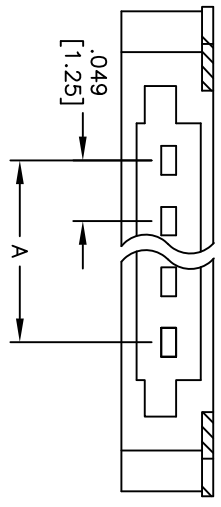

PACKAGED ON TAPE & REEL

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material: Nylon 9T, rated UL 94V-0
 Insulator color: Natural
 Contacts: Phosphor Bronze
 Plating:
 Tin over Copper underplate overall.

Electrical:
 Operating voltage: 100 V AC,DC.

Current rating: 1A AC,DC

Contact resistance: 20 mohms max. initial
 Dielectric withstanding voltage: 250 VAC for 1 minute

Temperature Rating:
 Operating temperature: -25°C to +85°C

Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds

Positions: 02 thru 16 and 18, 20, 22, 24, 26, 28, 30
 A = .049 [1.25] x No. of Spaces
 B = .049 [1.25] x No. of Spaces + .252 [6.40]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE IN INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLE SIZE
 .X ± .10 ØXX ± .10
 .XX ± .020 ØXXX ± .015
 .XXX ± .015 ØXXXX ± .010

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710
 TITLE: .049 [1.25] WAFER, SMT, RIGHT ANGLE
 TIN PLATED

DRAWN	DY	7/27/10	SIZE	PART NO.	REV.
CHECKED			X	125SH-G-XX-TR-SMT-T/R	
APPROVED			REF:	S00123T	SHEET 1 OF 1



6 5 4 3 2 1