APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/31/08	
A		REVISED SHAPE	11/04/09	

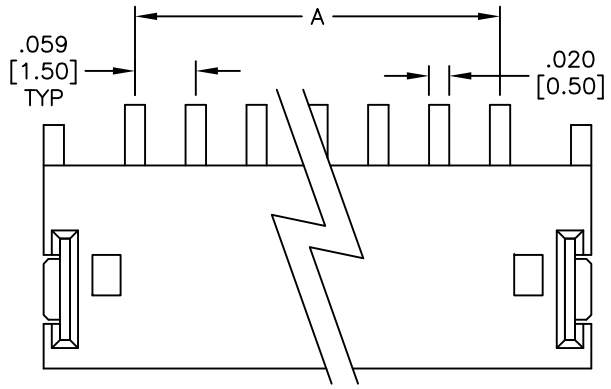

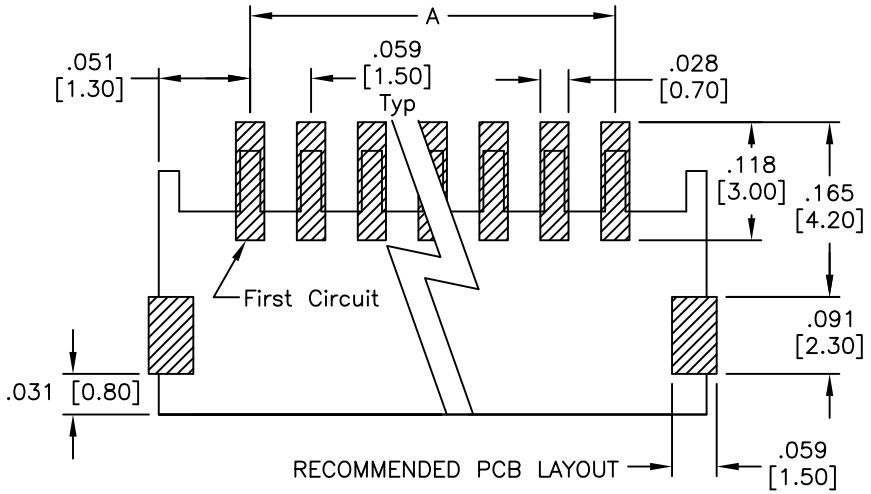

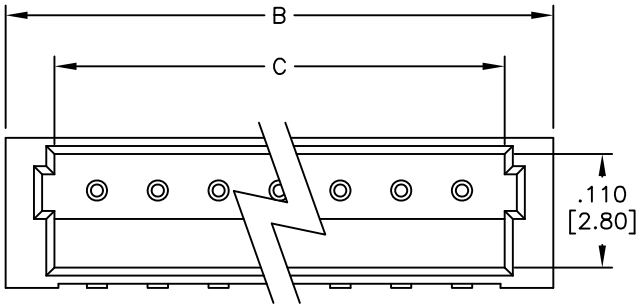

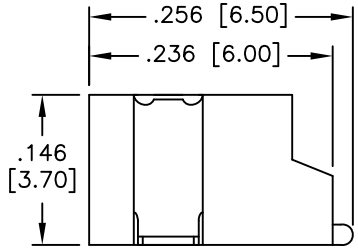

SPECIFICATIONS:

Material:
Insulator: Nylon 9T, rated UL 94V–0
Insulator color: Ivory
Contacts: Brass
Plating:
Tin over Nickel underplate overall
Electrical:
Operating voltage: 50 VAC max
Current rating: 1 Amps max
Contact resistance: 20 mohms max
Insulation resistance: 500 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: –25°C to +85°C
Environmental:
Lead free, RoHS compliant.
Recomended soldering: 260°C for 5 Sec.

RoHS COMPLIANT

PACKAGED IN TUBES

Poles: 2 thru 15
A= .059 [1.50] x No. of (Poles–1)
B= .059 [1.50] x No. of Poles + .118 [3.00]
C= .089 [1.50] x No. of Poles + .024 [0.60]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	1/31/08
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MX1.5mm WAFER 90°, SMT

SIZE	PART NO.	REV.
X	15SH-A-XX-TR-SMT	A

REF:	SCALE:	SHEET
S00123T	NTS	1 OF 1