
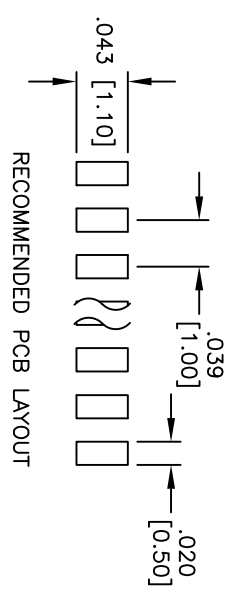
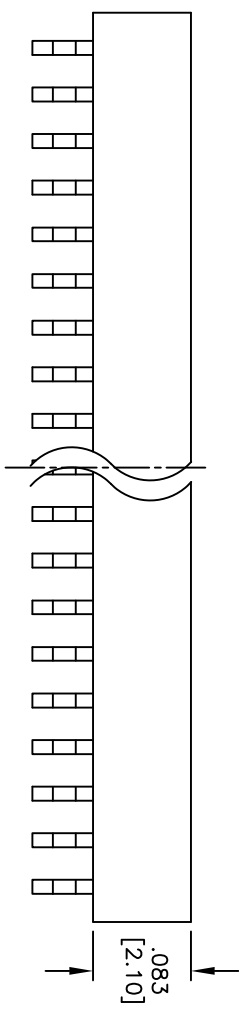
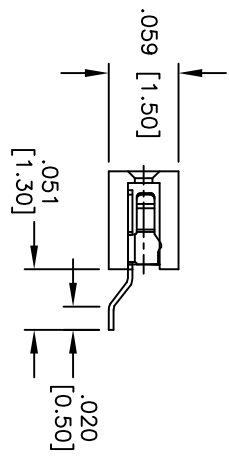


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/14/11	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

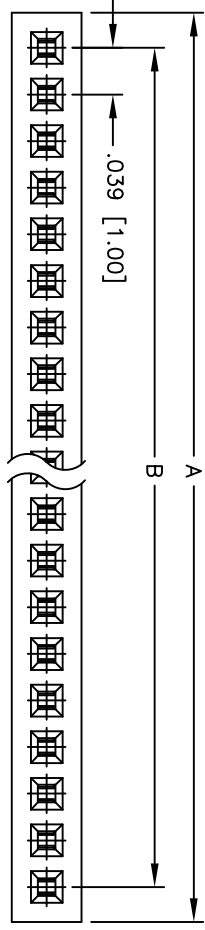

**SPECIFICATIONS:**

**Material:**  
 Insulator: LCP, glass reinforced, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Phosphor Bronze

**Plating:**  
 Gold flash over Nickel underplate overall.

**Electrical:**  
 Current rating: 0.5Amps max.  
 Contact resistance: 40 mohms max.  
 Insulation resistance: 500 Mohms min.  
 Dielectric withstanding voltage: 200 VAC for 1 minute

**Temperature Rating:**  
 Operating temperature: -40°C to +105°C

**Environmental:**  
 Lead free, ROHS compliant  
 Recommended soldering temp: 260°C for 5 seconds

A = .039 [1.00] x No. of Positions + .020 [0.50]  
 B = .039 [1.00] x No. of Spaces

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .039 [1.00] SINGLE ROW RECEPTACLE STRIP  
 RIGHT ANGLE, SMT TYPE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	1/14/11
APPROVED	

SIZE	PART NO.	REV.
X	IRS1R-XX-G-SMT	
REF:	SCALE: NTS	SHEET 1 OF 1

