

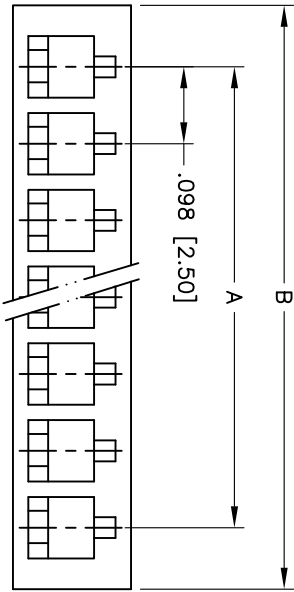


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/22/10	

APPROVED: _____
 DATE: _____ TITLE: _____

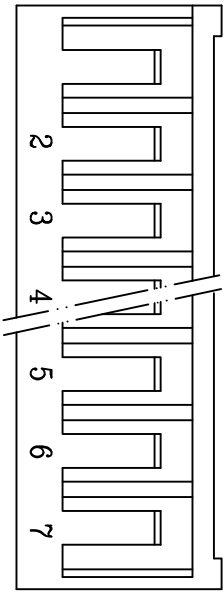

Positions: 02 thru 16
 A = .098 [2.50] x No. of Spaces
 B = .098 [2.50] x No. of Spaces + .157 [4.00]

SPECIFICATIONS:

Material: Nylon 66 UL 94V-0
 Insulator color: Brown
 Electrical:
 Operating voltage: 250V AC/DC
 Current rating: 2.5A AC/DC
 Insulation resistance: 1,000Mohms min.
 Withstand voltage: 800V AC for 1 minute.
 Environmental:
 Lead free, RoHS compliant



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

SHROUDED CRIMP TERMINAL HOUSING

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES		HOLE SIZE		DATE	
.X	± .10	Ø.X	± .10		
.XX	± .020	Ø.XX	± .015		
.XXX	± .015	Ø.XXX	± .010		
APPROVALS		DATE		TITLE	
DRAWN	DY	10/22/10		SHROUDED CRIMP TERMINAL HOUSING	
CHECKED				SIZE PART NO. 25CH-F-XX+BRN	
APPROVED				REF: S00163T SCALE: NTS SHEET 1 OF 1	