
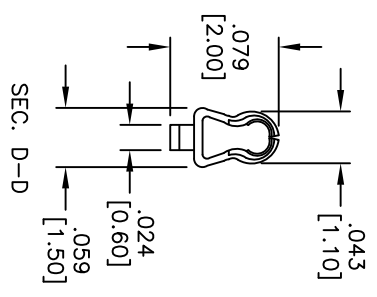

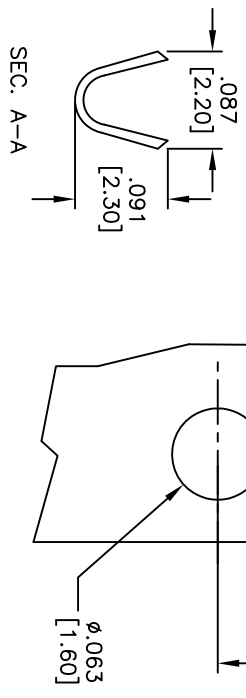


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/21/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

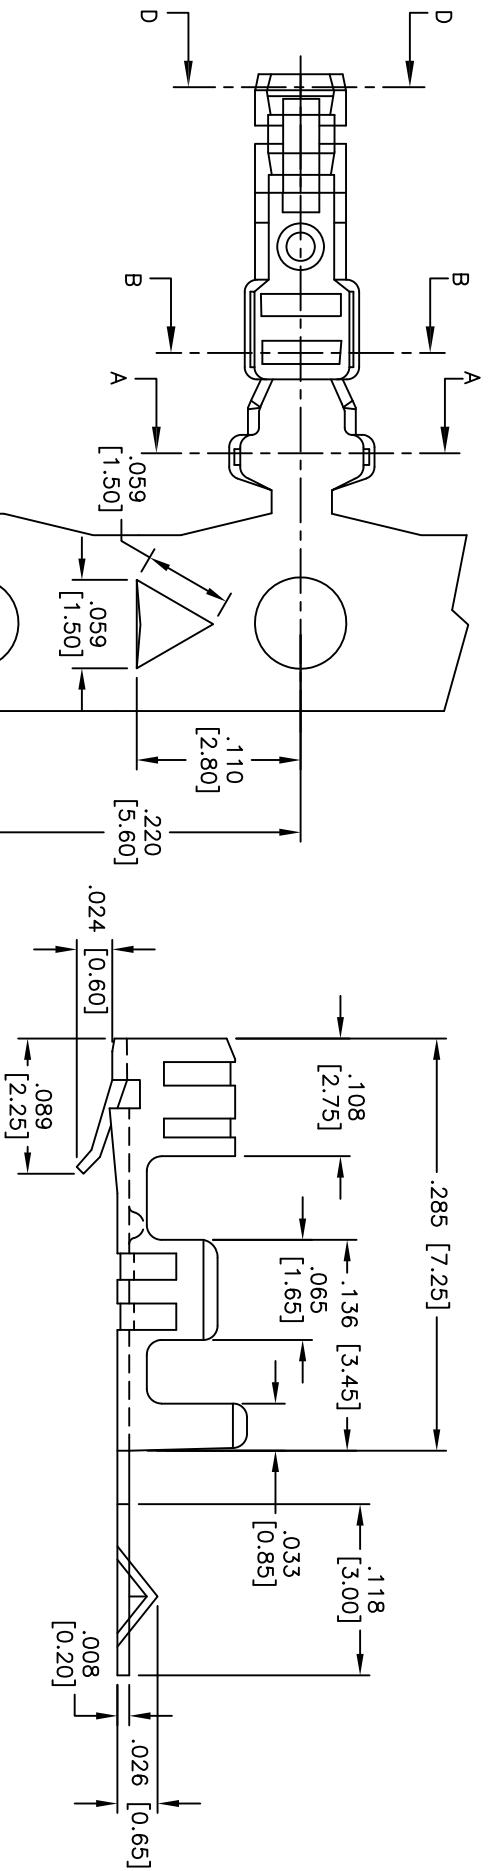

D  
C  
B  
A

D  
C  
B  
A

**SPECIFICATIONS:**

Material: Phosphor Bronze 0.2mm thick  
 Plating: Gold flash plated

**Electrical**

Operation voltage: 125 VAC  
 Current rating: 3 Amp  
 Contact resistance: 20 Mohms max.  
 Ambient temperature range: -40°C to +105°C

**Mechanical:**

Max Dia. of Insulation:  $\phi$ 1.9mm  
 Wire Range: 22-28 AWG.  
 Packaging: Chain Reel, 10K pcs / reel  
 Environmental:  
 Lead free, RoHS Compliant

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE IN INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLDS
.X ± .10	$\phi$ X ± .10
.XX ± .020	$\phi$ XX ± .015
.XXX ± .015	$\phi$ XXX ± .010

APPROVALS

DRAWN	DY	10/21/10
CHECKED		
APPROVED		

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .098 [2.50] CRIMP TERMINAL

SIZE	PART NO.	REV.
X	25CTE-G-R	-
REF: 500/23T	SCALE: NTS	SHEET 1 OF 1

6 5 4 3 2 1

A

