
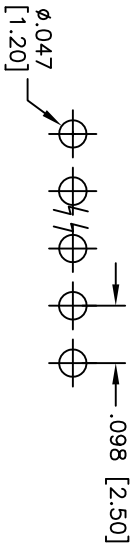
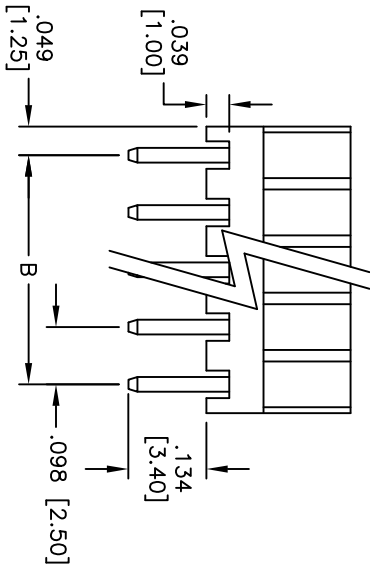
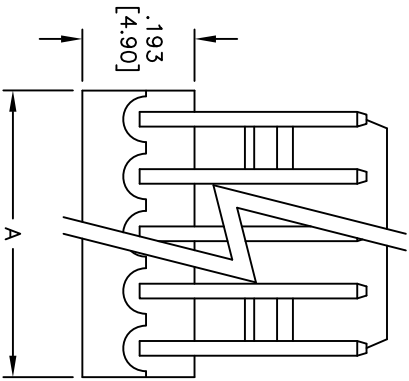


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/29/10	

APPROVED: _____
 DATE: _____ TITLE: _____

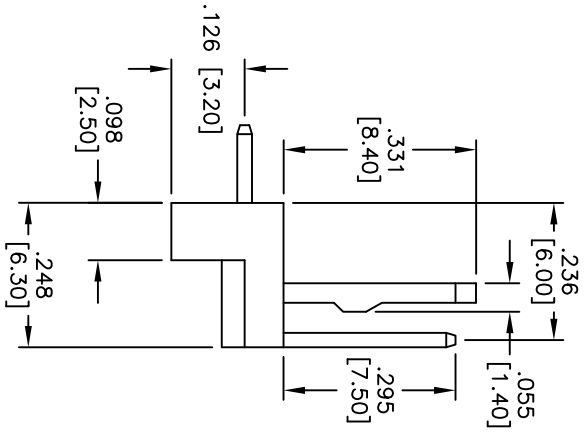

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

- Material: Nylon 66, rated UL 94V-0
- Insulator color: White
- Contacts: Brass
- Plating: Tin over Copper underplate overall
- Electrical:
 - Operating voltage: 250 VAC max
 - Current rating: 3 Amps max
 - Dielectric withstanding voltage: 1,500 VAC for 1 minute
 - Temperature Rating:
 - Operating temperature: -40°C to +105°C
- Environmental:
 - Lead free, RoHS compliant
 - Recommended soldering temp: 235°C for 5 seconds

Positions: 2 thru 20
 A = .098 [2.50] x No. of Positions
 B = .098 [2.50] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES: .X ± .10 ØX ± .10
 .XX ± .020 ØXX ± .015
 .XXX ± .015 ØXXX ± .010

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .098 [2.50] LOCKING HEADER
 RIGHT ANGLE, PCB, TIN PLATED

APPROVALS	DATE	SIZE	PART NO.	REV.
DRAWN	DY	11/29/10	25LHA-XX-TRA	-
CHECKED				
APPROVED				

REF: S00123T SCALE: NTS SHEET 1 OF 1