
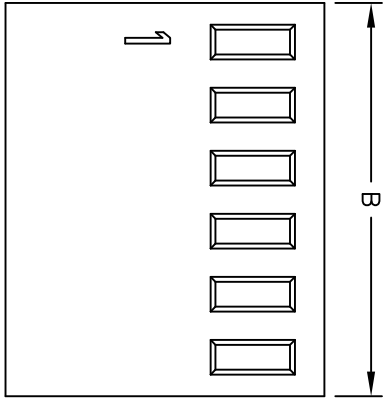
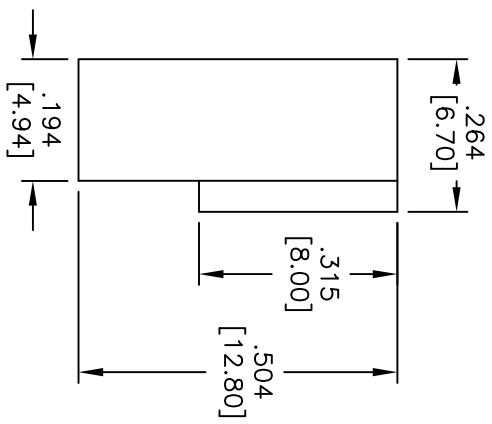


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/25/10	

APPROVED: _____
 DATE: _____ TITLE: _____

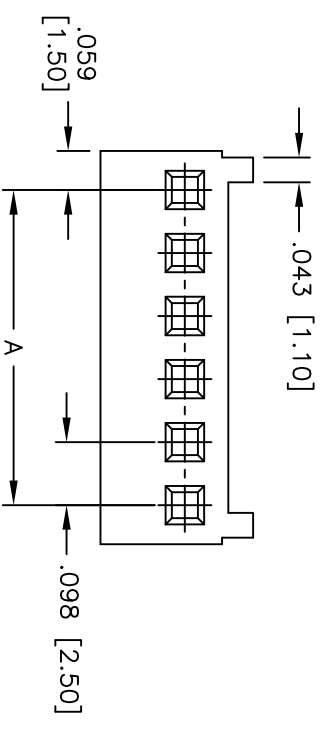

Positions: 2 thru 20
 A = .098 [2.50] X No. of Spaces
 B = .098 [2.50] X No. of Spaces + .118 [3.00]

SPECIFICATIONS:
Material: Insulator: Nylon 66, Rated UL 94V-0
 Insulator color: White
 Contacts: Brass
Plating: Tin over Copper underplate overall
Electrical:
 Operating voltage: 250 VAC max.
 Current rating: 3 Amps max.
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 1500 VAC / minute.
Temperature Rating: Operating temperature: -40°C to +105°C



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES ARE NOTED INCHES	
X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE		SIZE		PART NO.		REV.	
HOUSING, PITCH .098 [2.50], UL94V-0		X		25MTA-XX-V0			
WITH POLARIZING RIB, WITH LOCKING RAMP		REF: S00123T		SCALE: NTS		SHEET 1 OF 1	