

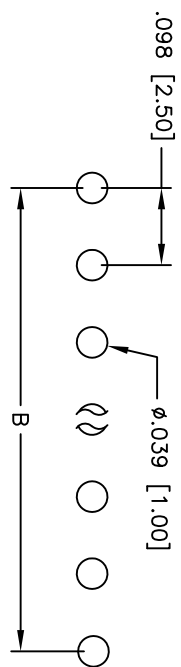
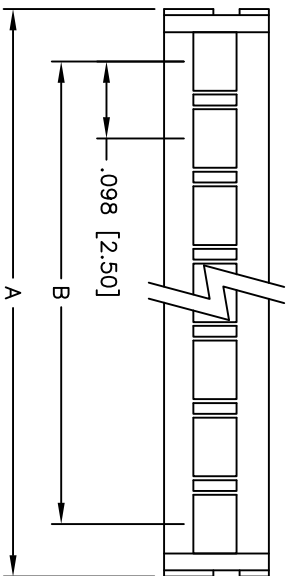


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/25/10	

APPROVED: _____
 DATE: _____ TITLE: _____

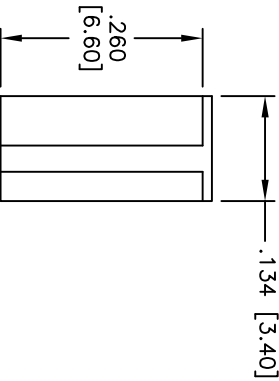

RECOMMENDED PCB LAYOUT

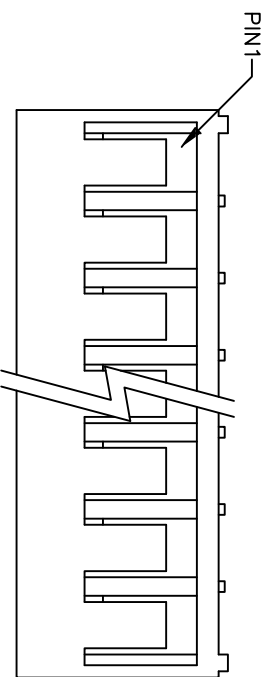

SPECIFICATIONS:

Material: Nylon 66, rated UL 94V-0
 Insulator color: White
 Contacts: Brass

Plating: Tin over Copper underplate overall

Electrical:
 Operating voltage: 250V AC, DC
 Current rating: 3A AC, DC

Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 800 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +85°C



Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds

Positions: 2 thru 16
 A = .098 [2.50] x No. of Spaces + .134 [3.40]
 B = .098 [2.50] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLDS	MM
X ± .10	ØXX ± .10	
.XX ± .020	ØXX ± .015	
.XXX ± .015	ØXXX ± .010	

APPROVALS	DATE
DRAWN	11/25/10
CHECKED	
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .098 [2.50] SHROUDED HEADER, PCB

SIZE: PART NO. 25SH-G-XX

REV.	DATE
X	

REF: S00123T SCALE: NTS SHEET 1 OF 1