
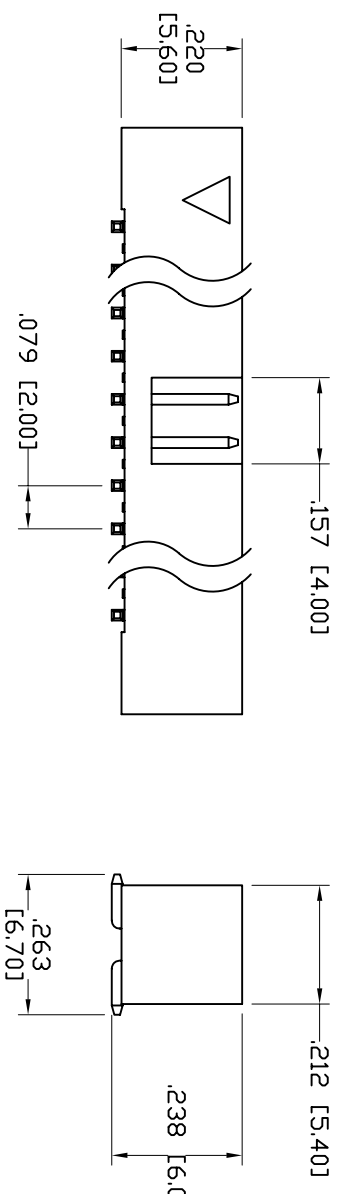
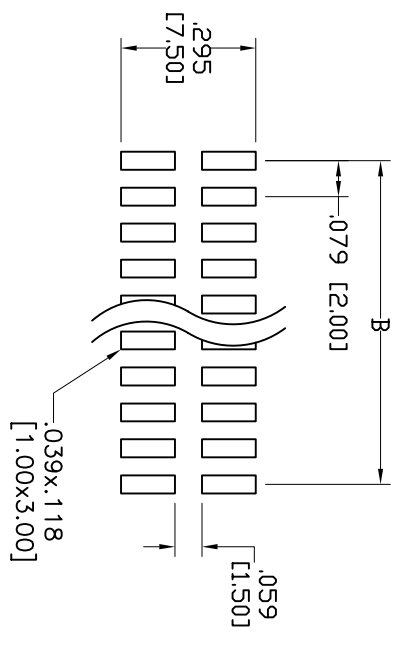


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/5/03	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

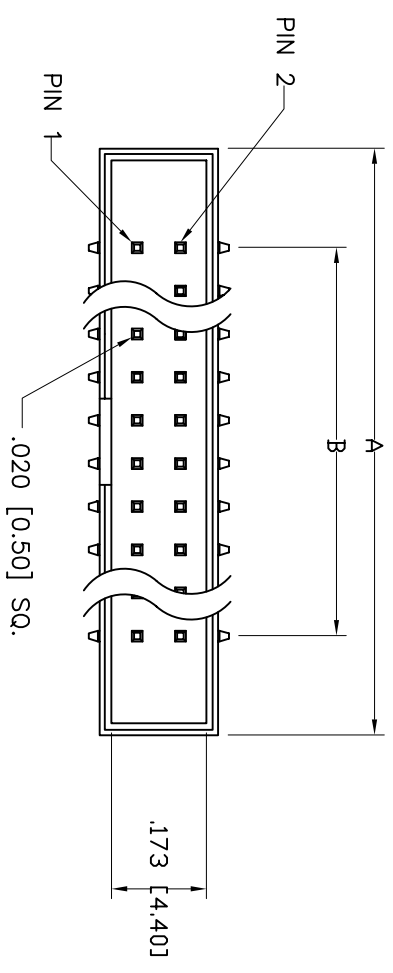

**SPECIFICATIONS:**

- Material: Insulator: Hi-Temp Nylon 6T, rated UL 94V-0
- Insulator color: Black
- Contacts: Brass
- Plating: Tin over Copper underplate overall
- Electrical: Operating voltage: 250 VAC max.
- Current rating: 1 Amp max.
- Contact resistance: 20 mohms max. initial
- Insulation resistance: 5,000 Mohms min.
- Dielectric withstanding voltage: 1,000 VAC for 1 minute
- Temperature Rating: Operating temperature: -40°C to +105°C
- Environmental: Lead free, RoHS compliant
- Recommended soldering temp: 260°C for 5 seconds

A = .079 [2.00] X No. of Spaces + .362 [9.20]  
 B = .079 [2.00] X No. of Spaces

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE MM [INCHES]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-0214

TITLE: 2.0 MM BOX HEADER, VERTICAL, TIN PLATED, SURFACE MOUNT

DRAWN	SLS	11/5/03
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	2BHR-XX-VTA-SMT	-
REF:	SCALE: NTS	SHEET 1 OF 1

