

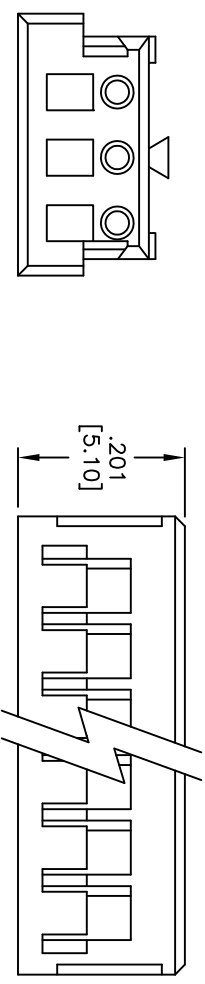
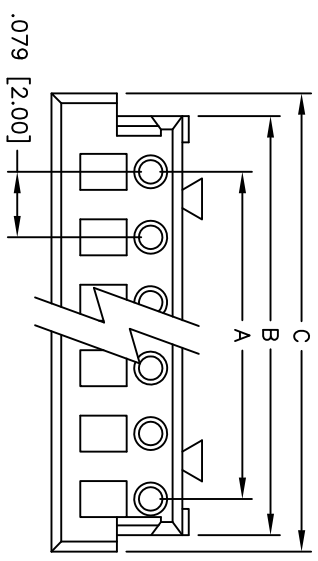


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/09/09	

APPROVED: _____
 DATE: _____ TITLE: _____

4~15 Circuits

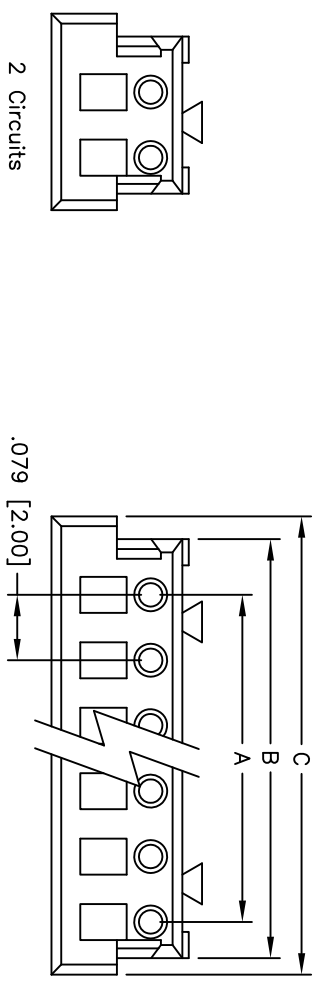

Positions: 2 thru 15
 A = .079 [2.00] x No. of Spaces
 B = .079 [2.00] x No. of Spaces + .110 [2.80]
 C = .079 [2.00] x No. of Spaces + .157 [4.00]

SPECIFICATIONS:
 Material: Nylon 66, rated UL 94V-0
 Insulator color: White
 Electrical:
 Operating voltage: 100 VAC max
 Current rating: 2 Amp max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 800 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant



ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
 .079 [2.00] CRIMP HOUSING

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN DY	11/09/09
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	2CH-D1-XX	-
REF: S00004T	SCALE: NTS	SHEET 1 OF 1

6 5 4 3 2 1