
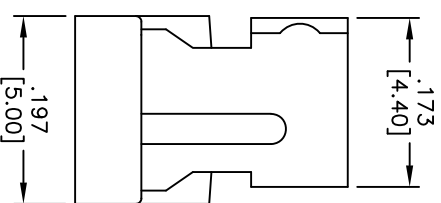
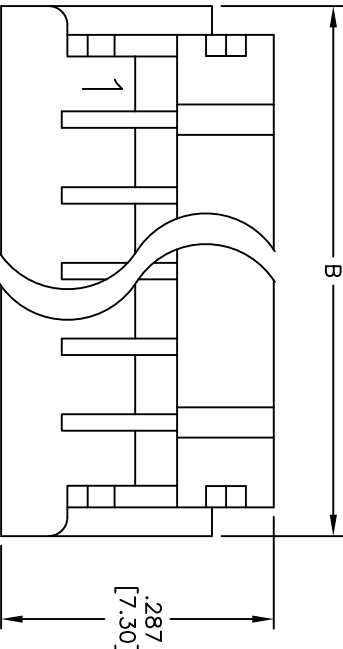


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/18/10	

APPROVED: _____
 DATE: _____ TITLE: _____

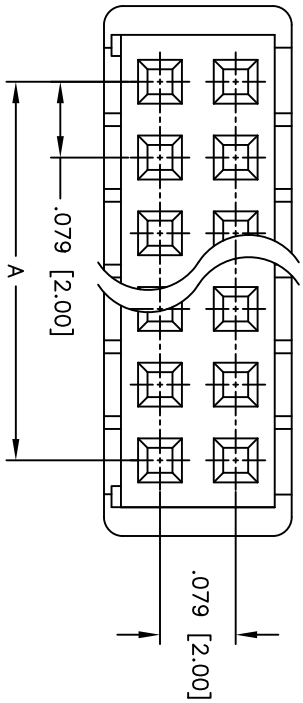

Positions: 4, 6, 8, 10, 12, 14, 16, 18, 20, 22,
 24, 26, 28, 30, 32, 40
 A = .079 [2.00] x No. of Spaces
 B = .079 [2.00] x No. of Spaces + .157 [4.00]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

.X	± .10	ØX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXX	± .010

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] HOUSING

SPECIFICATIONS:
 Material: Nylon 66, rated UL 94V-2
 Insulator color: White
 Electrical:
 Operating voltage: 250 VAC max
 Current rating: 2 Amp max
 Contact resistance: 30 Mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 800 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant



DRAWN		DY	3/18/10	SIZE	PART NO.	REV.
CHECKED				X	2CHD-C-XX	
APPROVED				REF: S00015T	SCALE: NTS	SHEET 1 OF 1