
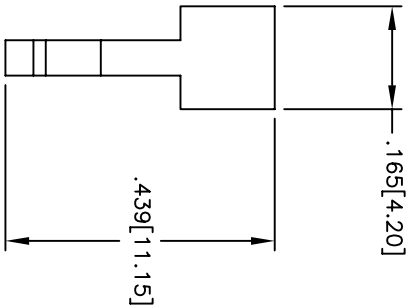


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/3/05	
A		ADDED ROHS INFO	01/26/06	BAS
B		ADDED DIM A TABLE	03/28/07	BAS
C		REVISED SHAPE	4/14/08	

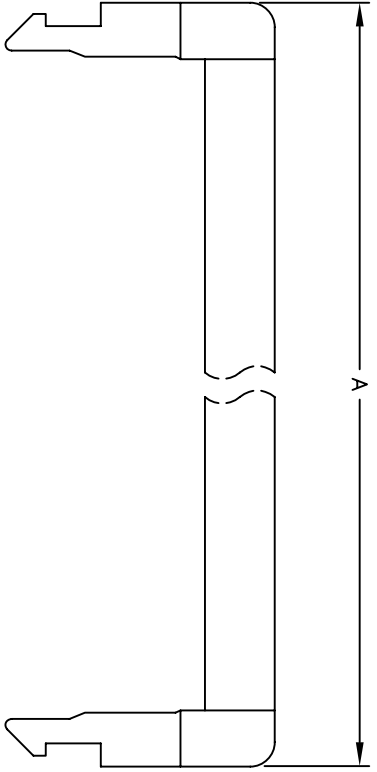

CONTACTS	A	CONTACTS	A
6PIN	11.20	26PIN	31.20
8PIN	13.20	28PIN	33.20
10PIN	15.20	30PIN	35.20
12PIN	17.20	32PIN	37.20
14PIN	19.20	34PIN	39.20
16PIN	21.20	36PIN	41.20
18PIN	23.20	40PIN	45.20
20PIN	25.20	44PIN	49.20
22PIN	27.20	50PIN	55.20
24PIN	29.20	68PIN	73.20

**SPECIFICATIONS:**

Material:  
 Insulator: PBT, glass reinforced,  
 rated UL 94V-0  
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES: .X ±.10 ØXX ±.10  
 .XX ±.020 ØXXX ±.015  
 .XXX ±.015 ØXXXX ±.010

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: STRAIN RELIEF FOR 2FCS SERIES

DRAWN	SS	6/3/05
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	2FSR-XX	C
REF:	SCALE: NTS	SHEET 1 OF 1