
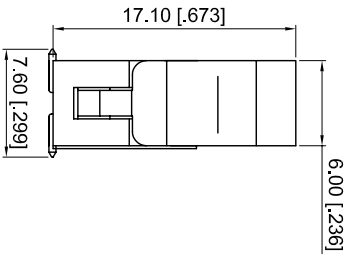


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/29/04	

APPROVED: _____
 DATE: _____ TITLE: _____

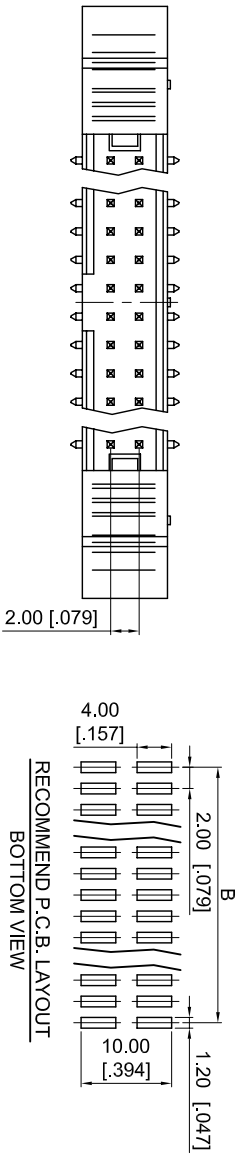

Number Of Position	DIMENSIONS	
	A	B
10	25.70[1.012]	8.00[0.315]
12	27.70[1.091]	10.00[0.394]
14	29.70[1.169]	12.00[0.472]
16	31.70[1.248]	14.00[0.551]
20	35.70[1.406]	18.00[0.709]
22	37.70[1.406]	20.00[0.787]
24	39.70[1.563]	22.00[0.866]
26	41.70[1.642]	24.00[0.945]
30	45.70[1.799]	28.00[1.102]
32	47.70[1.878]	30.00[1.181]
34	49.70[1.957]	32.00[1.260]
40	55.70[2.193]	38.00[1.496]
44	59.70[2.350]	42.00[1.654]
50	65.70[2.587]	48.00[1.890]
68	83.70[3.295]	66.00[2.598]

SPECIFICATIONS:

- Material: Hi-Temp thermoplastic, rated UL 94V-0
- Insulator color: Black
- Contacts: Copper Alloy
- Plating: Gold Flash over Nickel underplate on mating area, Tin over Copper underplate on solder tails
- Electrical:
 - Operating voltage: 250 VAC max
 - Current rating: 1 Amps max
 - Insulation resistance: 1000 Mohms min @ 500 VDC
 - Dielectric withstanding voltage: 500 VAC for 1 minute
- Temperature Rating:
 - Operating temperature: -40 to +85
 - Max processing temperature: 230 deg C for 30 to 60 seconds

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 2MM LATCHING BOX HEADER, STRAIGHT
 SMT, SELECTIVE GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED		APPROVALS	
.X ± .10	ØXX ± .10	DATE	
.XX ± .020	ØXXX ± .015		
.XXX ± .015	ØXXXX ± .010		
DRAWN	SS	9/29/04	
CHECKED			
APPROVED			
SIZE	PART NO.	SCALE	REV.
X	2MHR-XX-VSGA-S-SMT	NTS	-
REF:			