
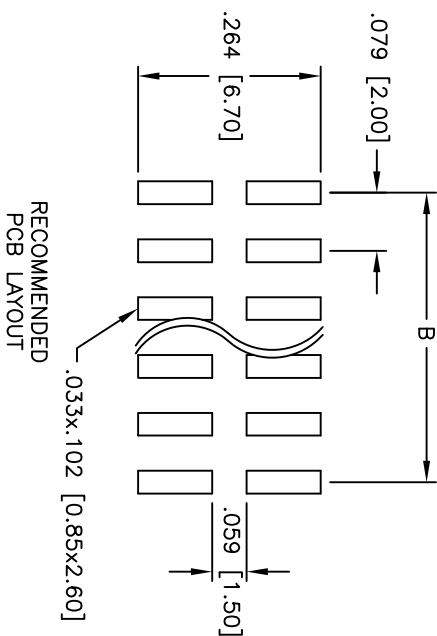
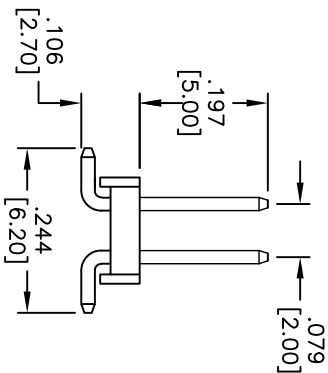
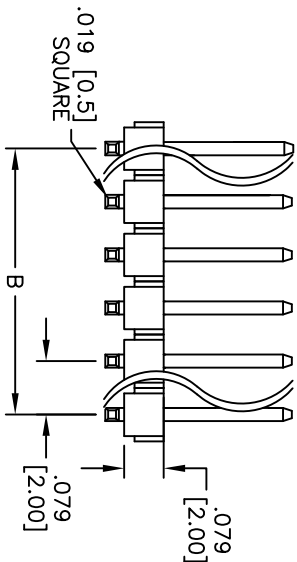


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

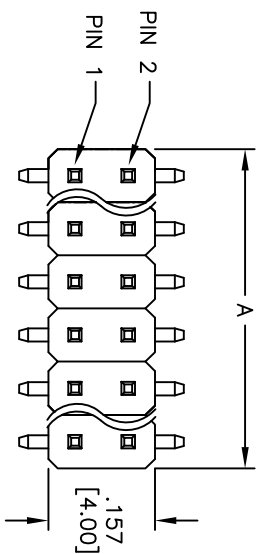

**SPECIFICATIONS:**

Material:

Insulator: Nylon 6T, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold Flash over Nickel underplate overall.

Electrical:

Operating voltage: 250 VAC max

Current rating: 1 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 260°C for 5 seconds

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/27/09	
A		REVISED SHAPE	11/30/09	

A = .079 [2.00] x No. of Positions  
 B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES                      Holes  
 .X                      ± .10                      ØXX                      ± .10  
 .XX                      ± .020                      ØXXX                      ± .015  
 .XXX                      ± .015                      ØXXXX                      ± .010

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] DUAL ROW PIN HEADER  
 SURFACE MOUNT, GOLD PLATED

DRAWN	DY	11/27/09	SIZE	PART NO.	REV.
CHECKED			X	2PH2-XX-1J-SMT-.197	A
APPROVED			REF: S00059T	SCALE: NTS	SHEET 1 OF 1



6

5

4

3

2

1