
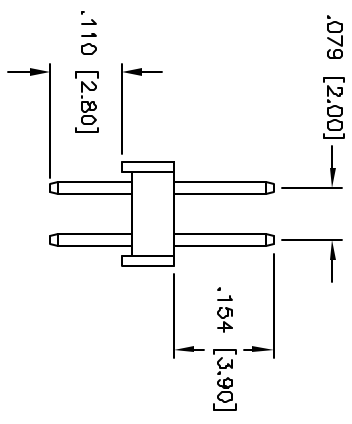
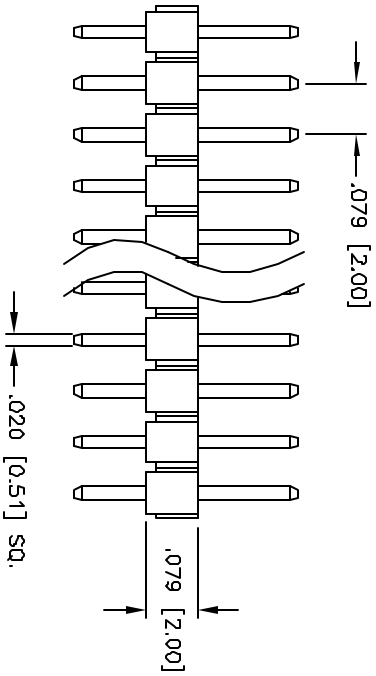
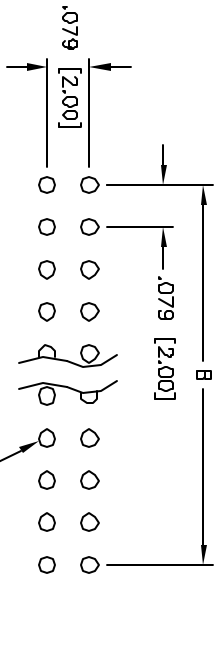


APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

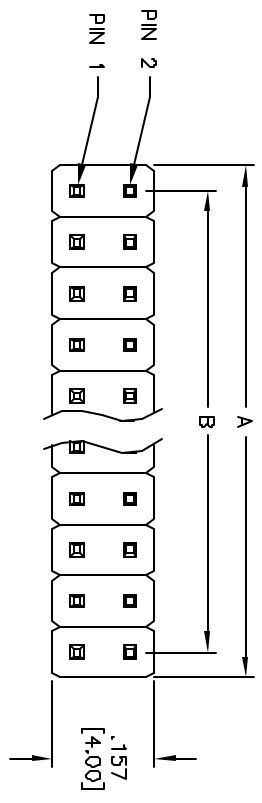

Positions: 2 thru 80  
 A = .079 [2.00] x No. of Positions per Row  
 B = .079 [2.00] x No. of Spaces

**SPECIFICATIONS:**  
 Material:  
 Insulator: PBT, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Brass  
 Plating:  
 Gold flash over Nickel underplate overall  
 Electrical:  
 Operating voltage: 250 VAC max  
 Current rating: 1 Amp max  
 Contact resistance: 20 Mohms max  
 Insulation resistance: 5,000 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 1,000 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -55°C to +105°C

Environmental:  
 Lead free, RoHS compliant  
 Recommended soldering temp: 230°C for 5 seconds



Rev	AWO #	Description	Date	Appr
-		RELEASED	3/31/05	

DRAWN		SS	3/31/05	TITLE	
CHECKED				079 [2.00] DUAL ROW PIN HEADER	
APPROVED				GOLD PLATED	
APPROVALS		DATE		ADAM TECH	
DRAWN		SS	3/31/05	909 Rahway Avenue, Union, NJ 07083	
CHECKED				Phone: 908-887-5000 Fax: 908-887-5710	
APPROVED				079 [2.00] DUAL ROW PIN HEADER	
APPROVALS		DATE		GOLD PLATED	
DRAWN		SS	3/31/05	SIZE PART NO.	
CHECKED				2PH2-XX-4A	
APPROVED				SCALE: NIB	
APPROVALS		DATE		SHEET 1 OF 1	

A

B

C

D

6

5

4

3

2

1