
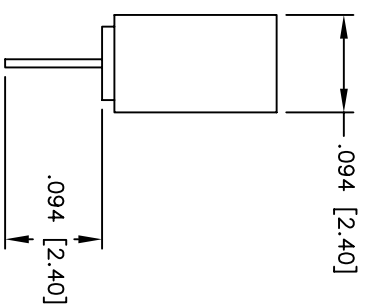
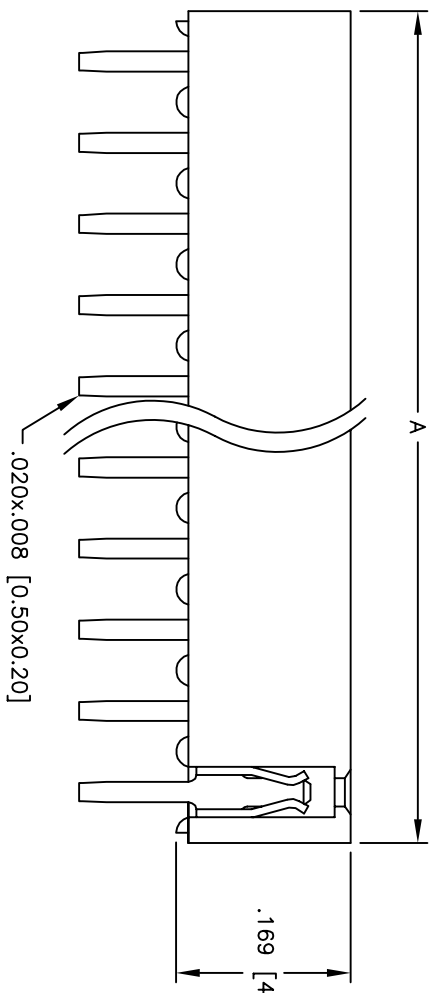
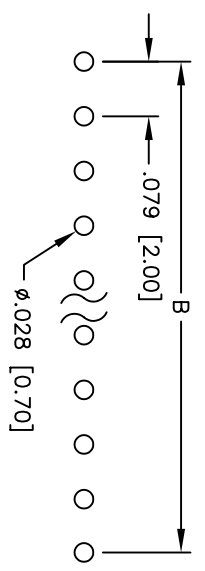


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/27/05	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

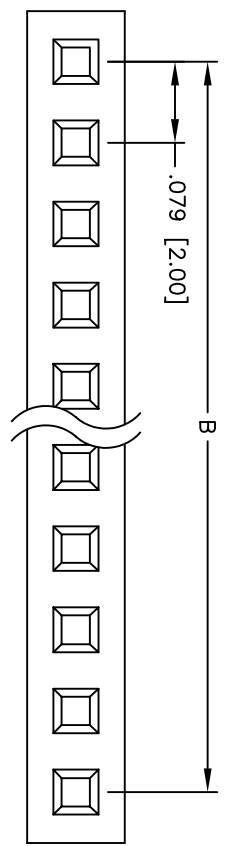

**SPECIFICATIONS:**

- Material: Nylon 46, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Plating: Gold flash over Nickel underplate overall
- Electrical:
  - Operating voltage: 250 VAC max.
  - Current rating: 1 Amp max.
  - Contact resistance: 20 mohms max. initial
  - Insulation resistance: 5,000 Mohms min.
  - Dielectric withstanding voltage: 1,000 VAC for 1 minute
- Temperature Rating:
  - Operating temperature: -40°C to +105°C
- Environmental:
  - Lead free, RoHS compliant
- Recommended soldering temp: 230°C for 5 seconds

Positions: 01 thru 40  
 A = .079 [2.00] x No. of Positions  
 B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE INCHES [MM]

TOLERANCES: EXCEPT AS NOTED	INCHES	HOLES
.X	± .10	ØXX ± .10
.XX	± .020	ØXXX ± .015
.XXX	± .015	ØXXX ± .010

APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] SINGLE ROW RECEPTACLE STRIP  
 .169 [4.30] HEIGHT

SIZE: X  
 PART NO.: 2RS1-XX-G  
 SCALE: NTS