

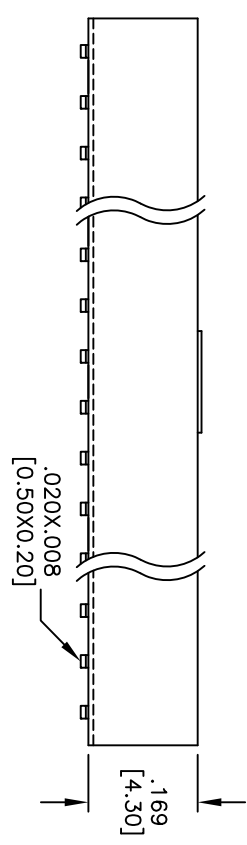
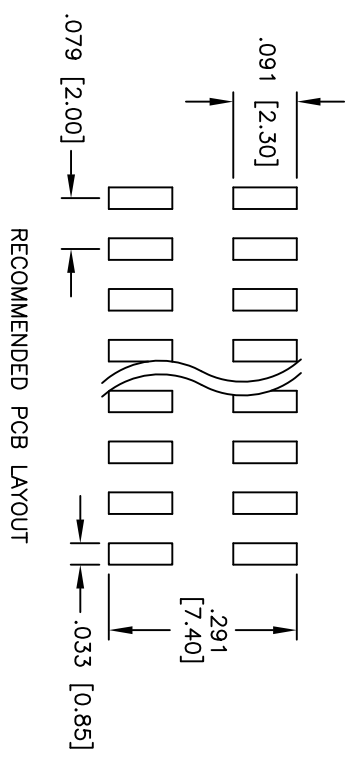


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/10/11	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

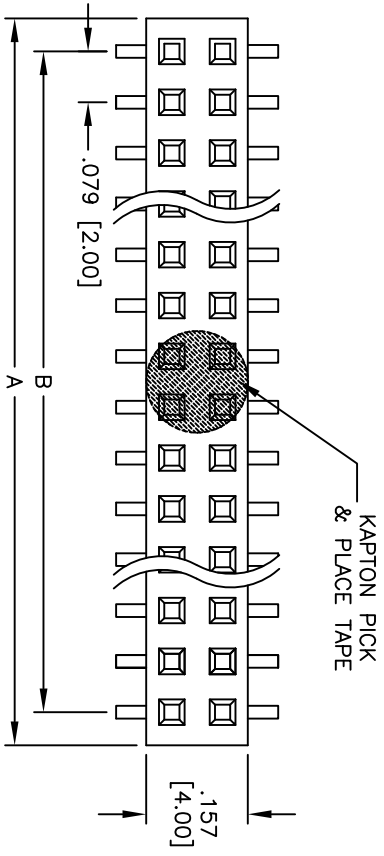

PACKAGED ON TAPE & REEL

Positions: 02 thru 40 per row  
 A = .079 [2.00] x No. of Positions + .024 [0.60]  
 B = .079 [2.00] x No. of Spaces

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079x.079 DUAL ROW RECEPTACLE STRIP  
 .169 [4.30] HEIGHT, SMT

**SPECIFICATIONS:**

- Material: Hi-temp thermoplastic, UL 94V-0
- Insulator: Black
- Insulator color: Black
- Contacts: Phosphor Bronze
- Plating: Gold flash over Nickel underplate overall.
- Electrical:
  - Current rating: 2 Amps max.
  - Contact resistance: 20 mohms max. Initial
  - Insulation resistance: 1,000 Mohms min.
  - Dielectric withstanding voltage: 500 VAC for 1 minute
- Temperature Rating:
  - Operating temperature: -40°C to +105°C
- Environmental:
  - Lead free, RoHS compliant
  - Recommended soldering temp: 260°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS	DATE	TITLE	
DRAWN	DY	3/10/11	
CHECKED		SIZE	
APPROVED		X	
REF: S00032T		SCALE: NTS	
SHEET 1 OF 1		REV.	