

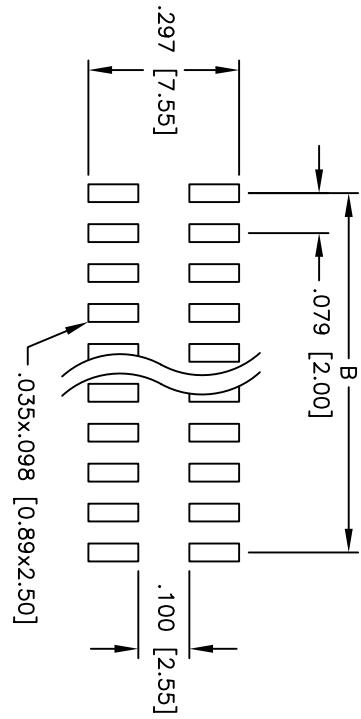
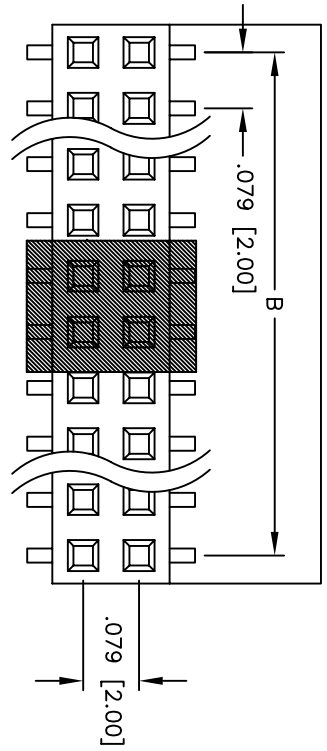


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/26/06	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

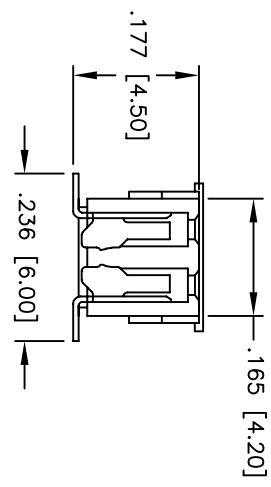

RECOMMENDED  
PCB LAYOUT

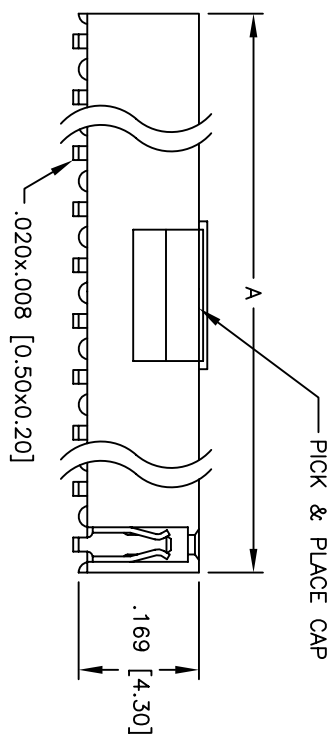

Positions: 02 thru 80  
 A = .079 [2.00] x No. of Positions per Row  
 B = .079 [2.00] x No. of Spaces

NOTE: PACKAGED ON TAPE & REEL

**SPECIFICATIONS:**  
 Material: Nylon 46, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Phosphor Bronze  
 Plating:  
 Gold flash over Nickel underplate overall  
 Electrical:  
 Operating voltage: 250 VAC max.  
 Current rating: 1 Amp max.  
 Contact resistance: 20 mohms max. initial  
 Insulation resistance: 5,000 Mohms min.  
 Dielectric withstanding voltage: 1,000 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -40°C to +105°C  
 Environmental:  
 Lead free, RoHS compliant  
 Recommended soldering temp: 260°C for 5 seconds



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE  
 .079 x .079 DUAL ROW RECEPTACLE STRIP  
 .169 [4.30] HEIGHT, SMT, PEGS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		Holes		DATE	
.X	±.10	ØX	±.10	DATE	
.XX	±.020	ØXX	±.015		
.XXX	±.015	ØXXX	±.010		
APPROVALS		DATE			
DRAWN	SS	5/26/06			
CHECKED					
APPROVED					
SIZE	PART NO.	TITLE		REV.	
X	2RS2-XX-G-SMT-P-T/R	.079 x .079 DUAL ROW RECEPTACLE STRIP		.	
REF:	SCALE: NTS	SHEET 1 OF 1			