

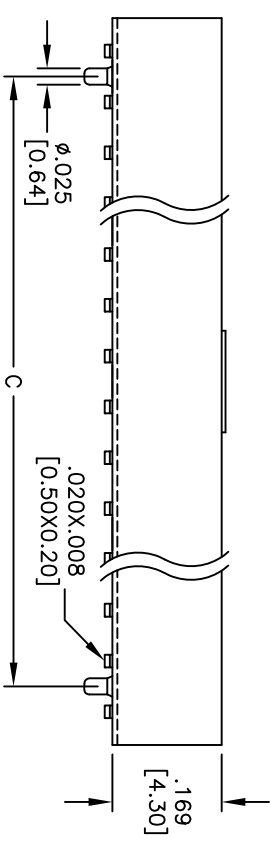
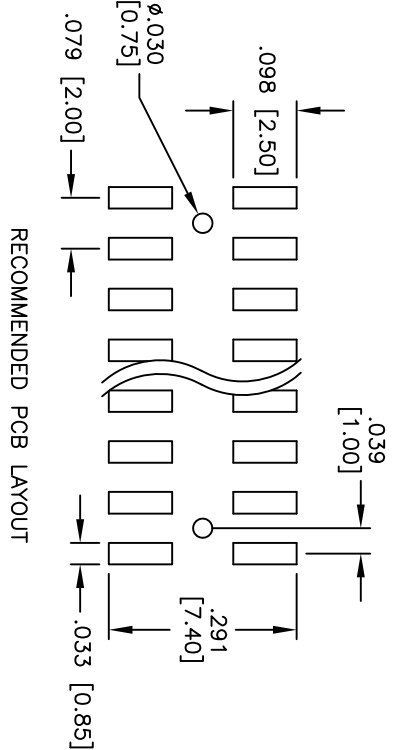


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/20/09	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

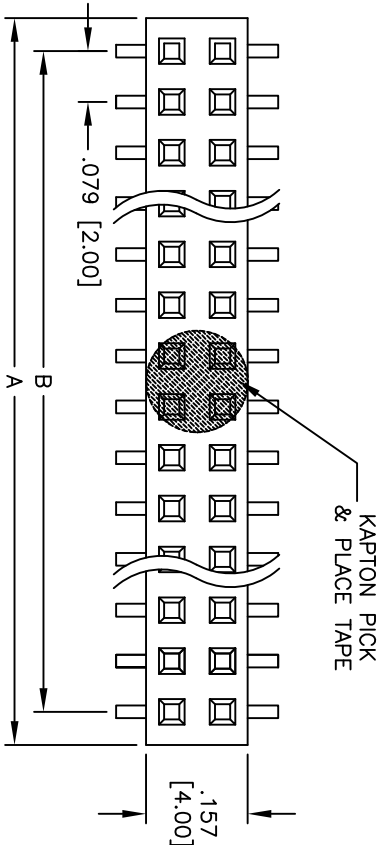

PACKAGED ON TAPE & REEL

Positions: 03 thru 40 per row  
 A = .079 [2.00] x No. of Positions + .024 [0.60]  
 B = .079 [2.00] x No. of Spaces  
 C = .079 [2.00] x No. of Positions - .157 [4.00]

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE  
 .079x.079 DUAL ROW RECEPTACLE STRIP  
 .169 [4.30] HEIGHT, SMT, PEGS

**SPECIFICATIONS:**

Material: Nylon6T, UL 94V-0  
 Insulator color: Black  
 Contacts: Phosphor Bronze  
 Plating:  
 Gold flash over Nickel underplate on contact area,  
 Tin over Copper underplate on tails.

Electrical:  
 Current rating: 2 Amps max.

Contact resistance: 20 mohms max. initial  
 Insulation resistance: 1,000 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -40°C to +105°C

Environmental:  
 Lead free, RoHS compliant

Recommended soldering temp: 260°C for 5 seconds



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE IN INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES HOLEES [MM]  
 .X ± .10 ØXX ± .10  
 .XX ± .020 ØXXX ± .015  
 .XXX ± .015 ØXXX ± .010

APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	2RS2-XX-SG-SMT-P-KT-T/R	-
REF: S0032T	SCALE: NTS	SHEET 1 OF 1

6 5 4 3 2 1