
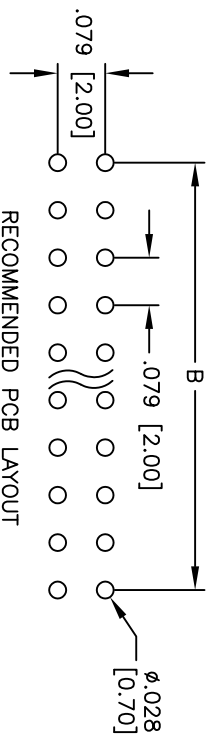
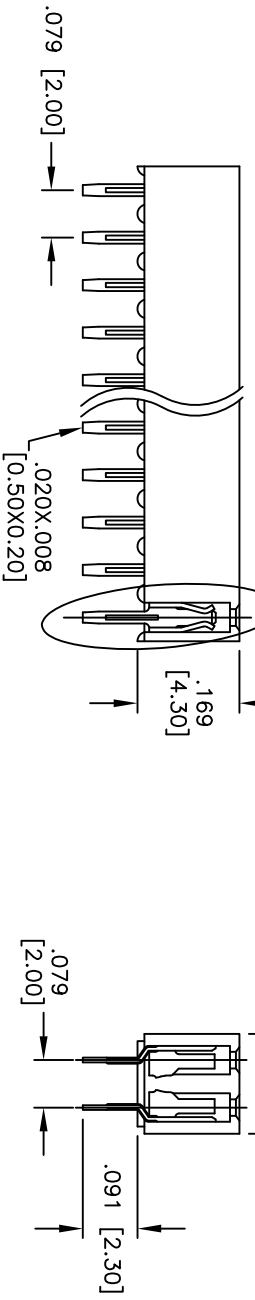


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/23/07	
A		CHANGED TERMINALS	9/02/09	
B		CHANGED TERMINALS	5/06/11	

APPROVED: _____
 DATE: _____ TITLE: _____

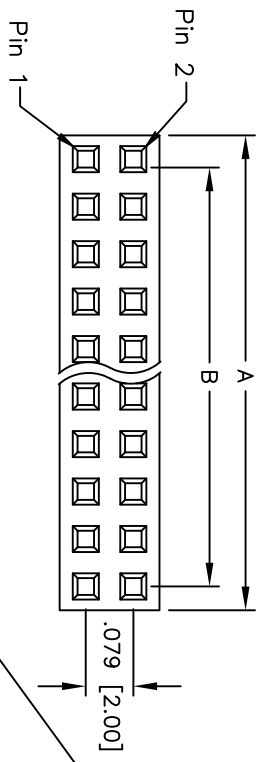

SPECIFICATIONS:
 Material: Nylon, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: Tin over Copper underplate overall
 Electrical: Current rating: 1 Amp max.
 Contact resistance: 20 mohms max. initial
 Insulation resistance: 5,000 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating: Operating temperature: -40°C to +105°C
 Environmental: Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds

Positions: 02 thru 80
 A = .079 [2.00] x No. of Positions per Row
 B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]			
.X	± .10	ØX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS	DATE		
DRAWN	SS	5/23/07	
CHECKED			
APPROVED			

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710
 TITLE: .079 x .079 DUAL ROW RECEPTACLE STRIP
 .169 [4.30] HEIGHT, TIN PLATED

RECOMMENDED SOLDERING TEMP: 235°C FOR 5 SECONDS



SIZE	PART NO.	REV.
X	2RS2-XX-T	B
REF: S00099T	SCALE: NTS	SHEET 1 OF 1