

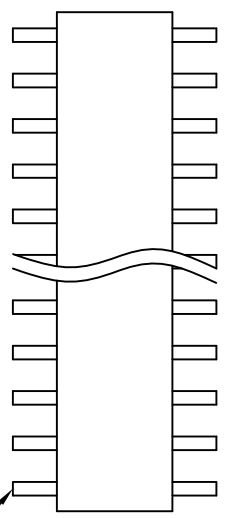

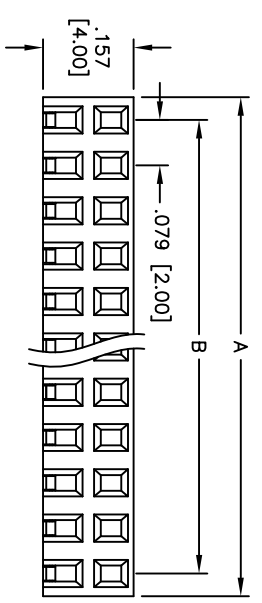


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/7/10	

APPROVED: _____
 DATE: _____ TITLE: _____



.024X.008
 [0.60X0.20]

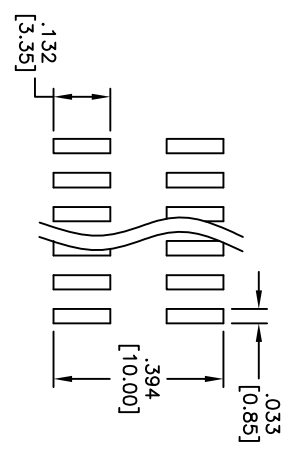

A = .079 [2.00] X No. of Positions
 B = .079 [2.00] X No. of Spaces

SPECIFICATIONS:
 Material: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: Gold Flash over Nickel underplate on contact area, Tin over Copper/underplate on solder tails
 Electrical:
 Current rating: 2 Amp max.
 Contact resistance: 20 mΩ max.
 Insulation resistance: 1,000 MΩ min.
 Dielectric withstanding voltage: 500 V AC/DC
 Environmental:
 Operating temperature: -40°C to +105°C
 Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
INCHES	MM
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN AY	12/7/10
CHECKED AW	12/7/10
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] PITCH RECEPTACLE STRIP
 DUAL ROW, SMT

SIZE X
 PART NO. 2RS2BRL-XX-SG-SMT
 REF: S00032T SCALE: NTS SHEET 1 OF 1