

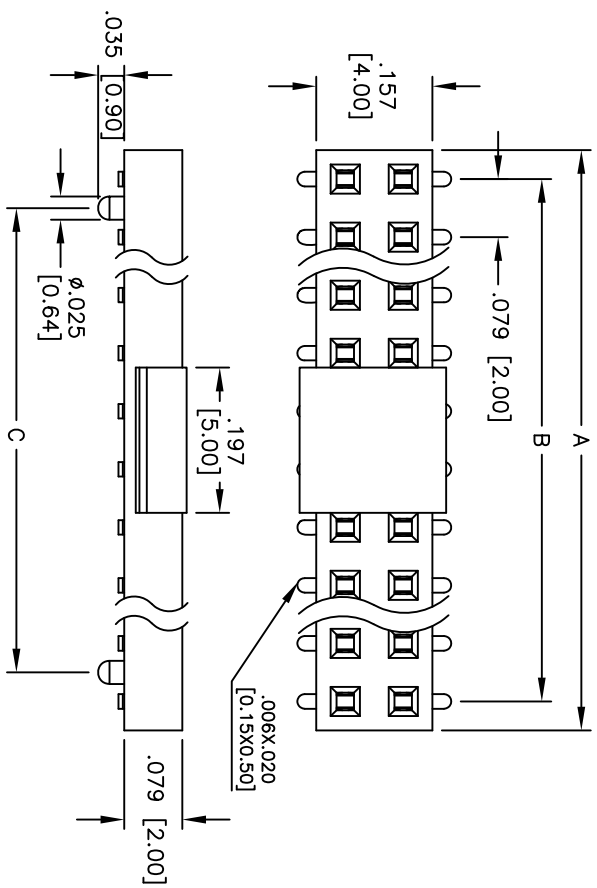


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/23/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

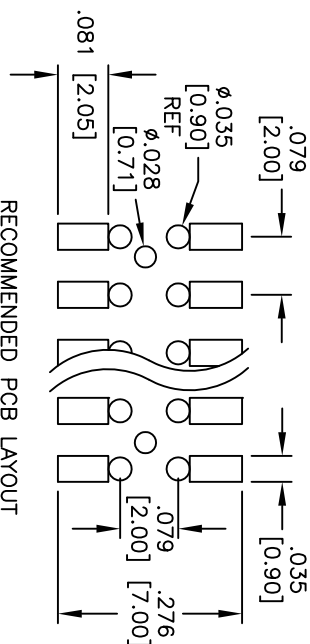

Positions: 02 thru 40 per row  
 A = .079 [2.00] x No. of Positions  
 B = .079 [2.00] x No. of Spaces  
 C = .079 [2.00] x No. of Positions-.157 [4.00]

PACKAGED ON TAPE & REEL

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE  
 .079X.079 DUAL ROW RECEPTACLE STRIP  
 .079 [2.00] HEIGHT, GOLD PLATED, SMT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HILES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN AY	7/23/10
CHECKED AH	7/23/10
APPROVED	

SIZE	PART NO.	REV.
X	2RS2G-XX-G-SMT-P-PP-T/R	-
REF: S00032T	SCALE: NTS	SHEET 1 OF 1



SPECIFICATIONS:  
 Material: Insulator: Nylon 6T, UL 94V-0  
 Insulator color: Black  
 Contacts: Phosphor Bronze  
 Plating: Gold flash over Nickel underplate overall.  
 Electrical: Current rating: 2 Amps max.  
 Contact resistance: 20 mohms max. initial  
 Insulation resistance: 1,000 Mohms min.  
 Dielectric withstanding voltage: 500 VAC for 1 minute  
 Temperature Rating: Operating temperature: -40°C to +105°C  
 Environmental: Lead free, RoHS compliant  
 Recommended soldering temp: 260°C for 5 seconds