
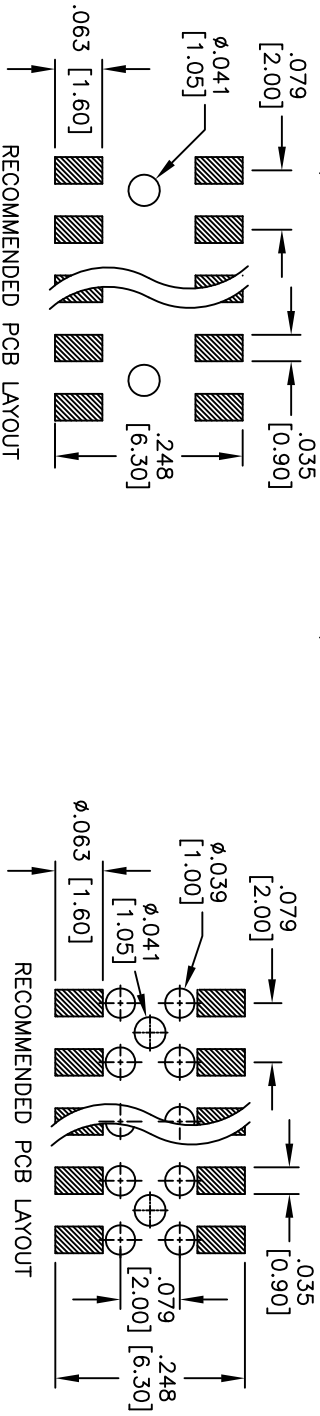
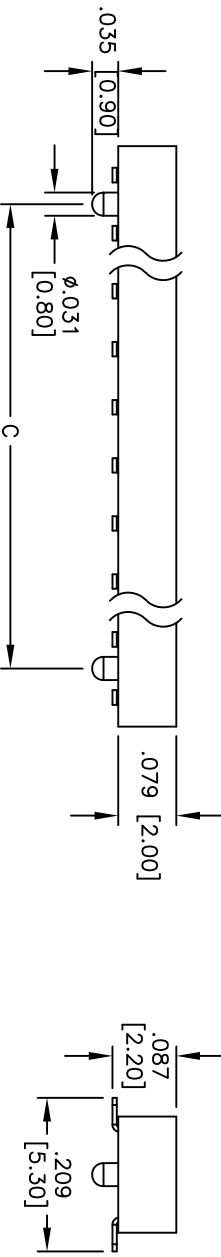


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/23/11	

APPROVED: _____
 DATE: _____ TITLE: _____

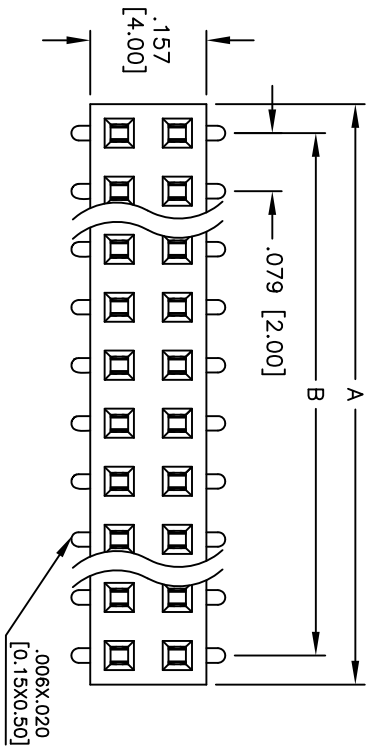

SPECIFICATIONS:
 Material: Nylon 6T, UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: Gold flash over Nickel underplate overall.
 Electrical:
 Current rating: 2 Amps max.
 Contact resistance: 20 mohms max. initial
 Insulation resistance: 1,000 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds

Positions: 03 thru 40 per row
 A = .079 [2.00] x No. of Positions
 B = .079 [2.00] x No. of Spaces
 C = .079 [2.00] x No. of Positions-.157 [4.00]

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

A

TITLE
 .079x.079 DUAL ROW RECEPTACLE STRIP
 .079 [2.00] HEIGHT, GOLD PLATED, SMT

6



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ±.10	ØX ±.10
.XX ±.020	ØXXX ±.015
.XXX ±.015	ØXXX ±.010
APPROVALS	DATE
DRAWN	5/23/11
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	2RS2G-XX-G-SMT-P	-
REF: S00032T	SCALE: NTS	SHEET 1 OF 1

6 **5** **4** **3** **2** **1**