

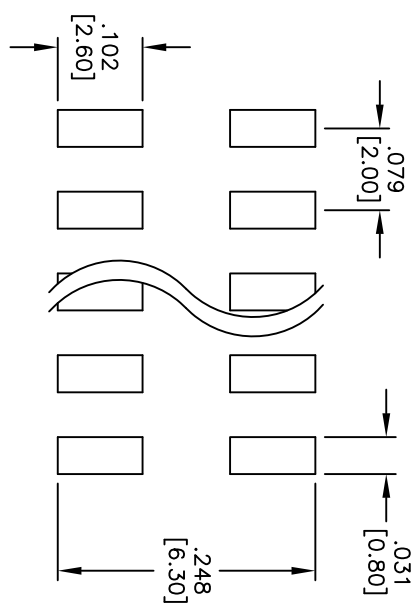
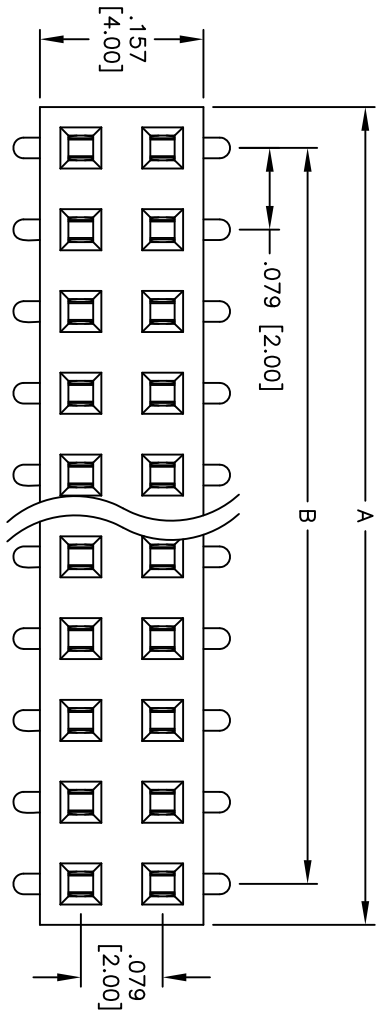


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/23/10	

APPROVED: _____
 DATE: _____ TITLE: _____



RECOMMENDED PCB LAYOUT

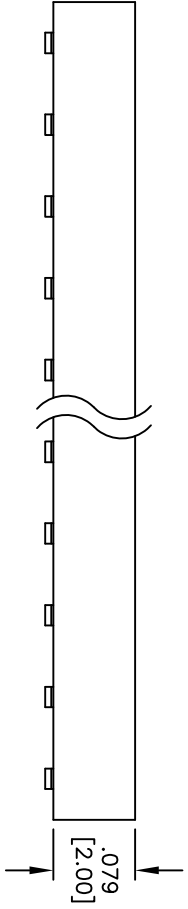

SPECIFICATIONS:
 Material: Insulator: Nylon 6T, UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: Gold flash over Nickel underplate overall.

Electrical: Current rating: 2 Amps max.
 Contact resistance: 20 mohms max. initial
 Insulation resistance: 1,000 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating: Operating temperature: -40°C to +105°C
 Environmental: Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds

Positions: 02 thru 40 per row
 A = .079 [2.00] x No. of Positions
 B = .079 [2.00] x No. of Spaces

PACKAGED ON TAPE & REEL

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079x.079 DUAL ROW RECEPTACLE STRIP
 .079 [2.00] HEIGHT, GOLD PLATED, SMT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]			
.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS			
DRAWN	AY	DATE	7/23/10
CHECKED	AH	DATE	7/23/10
APPROVED		DATE	

SIZE	PART NO.	REV.
X	2RS2G-XX-G-SMT-T/R	
REF: S00032T	SCALE: NTS	SHEET 1 OF 1

