

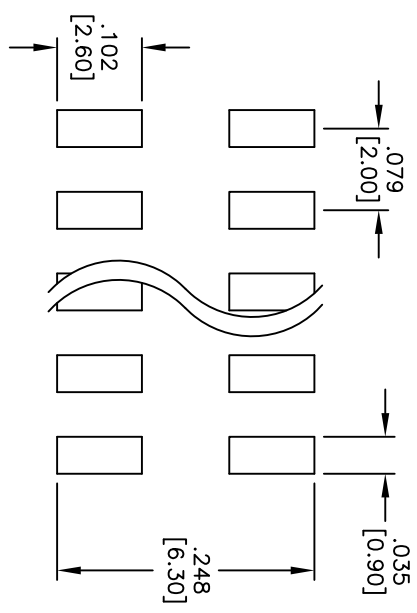


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/01/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

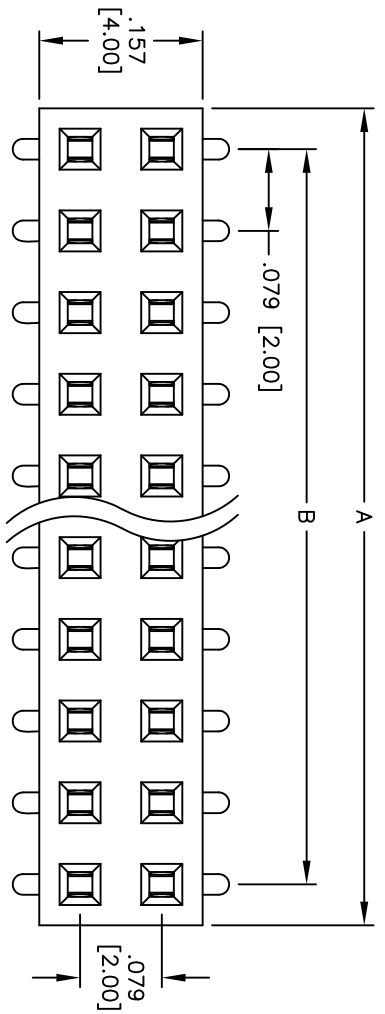

RECOMMENDED PCB LAYOUT

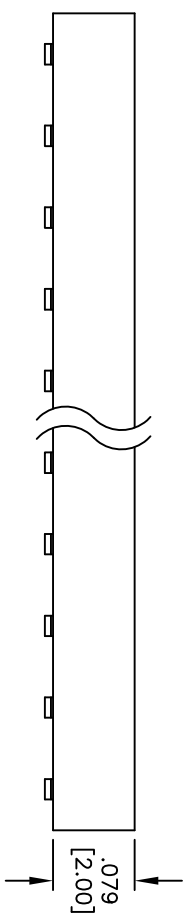

Positions: 02 thru 40 per row  
 A = .079 [2.00] x No. of Positions  
 B = .079 [2.00] x No. of Spaces

**SPECIFICATIONS:**

Material: Nylon 6T, UL 94V-0  
 Insulator color: Black  
 Contacts: Phosphor Bronze  
 Plating: Gold flash over Nickel underplate on contact area, Tin over Copper underplate on tails.

**Electrical:**

Current rating: 2 Amps max.  
 Contact resistance: 20 mohms max. initial  
 Insulation resistance: 1,000 Mohms min.  
 Dielectric withstanding voltage: 500 VAC for 1 minute  
 Temperature Rating: Operating temperature: -40°C to +105°C

Environmental: Lead free, RoHS compliant  
 Recommended soldering temp: 260°C for 5 seconds



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079x.079 DUAL ROW RECEPTACLE STRIP  
 .079 [2.00] HEIGHT, SEL GOLD PLATED, SMT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXX	± .010
DRAWN		DATE	
CHECKED		DATE	
APPROVED		DATE	
SIZE	PART NO.	REF:	SCALE:
X	2RS2G-XX-SG-SMT	S00032T	NTS
REV.		SHEET	1 OF 1