


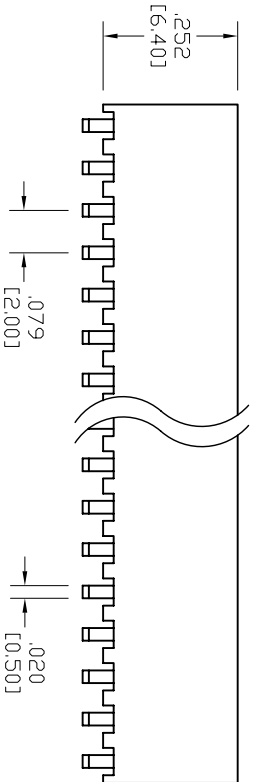
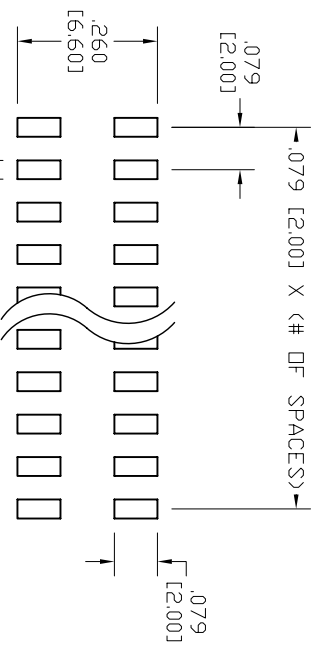



Rev	AWO #	Description	Date	Appr
-		RELEASED	6/23/08	

APPROVED: _____
 DATE: _____ TITLE: _____

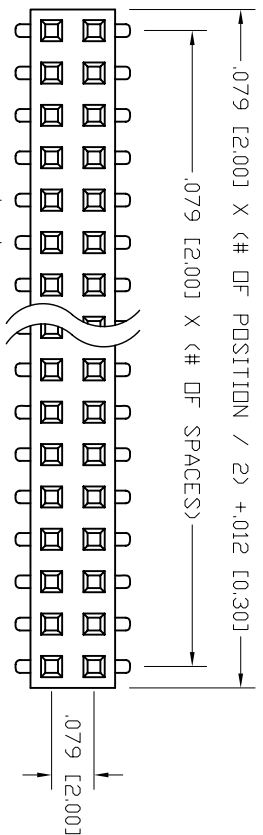

RECOMMENDED
PCB LAYOUT



SPECIFICATIONS:

Material: Insulator: Nylon 6T, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating: Gold Flash over Nickel underplate on contact area, Tin over Copper underplate on SMT tails

Operating voltage: 250 VAC max

Current rating: 1 Amp max

Contact resistance: 30 mohms max

Insulation resistance: 3000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating: Operating temperature: -40°C to +105°C

Environmental: Lead free, RoHS Compliant

Recommended soldering temp: 260°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
INCHES	MM
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 2.0MM RECEPTACLE STRIP, DUAL ROW
 6.4MM INSULATOR HEIGHT, SMT

SIZE	PART NO.	REV.
X	2RS2H-XX-SG-SMT	-
REF:	SCALE: NTS	SHEET 1 OF 1