

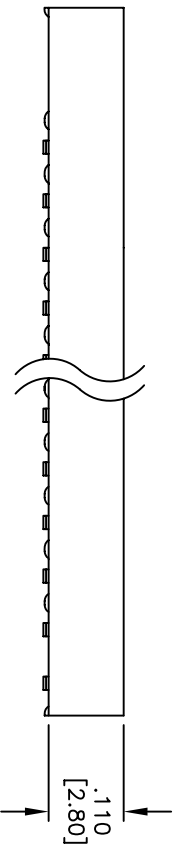
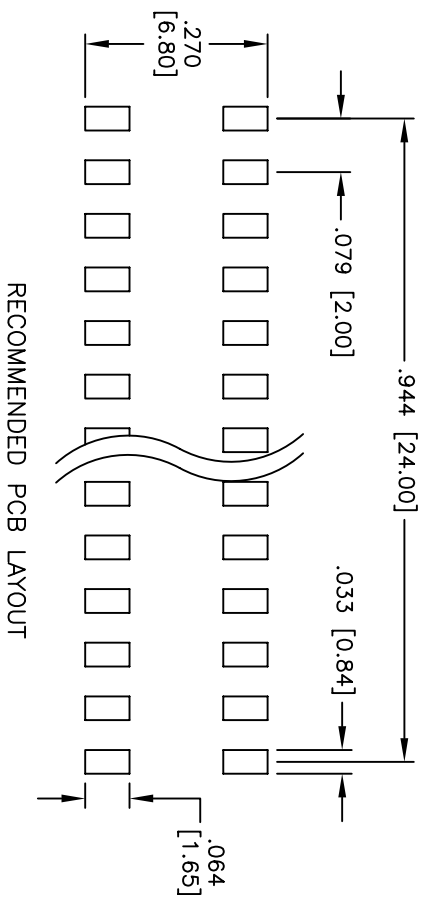


Rev	AWO #	Description	Date	Appr
-	7830	RELEASED	6/18/07	

APPROVED: _____
 DATE: _____ TITLE: _____

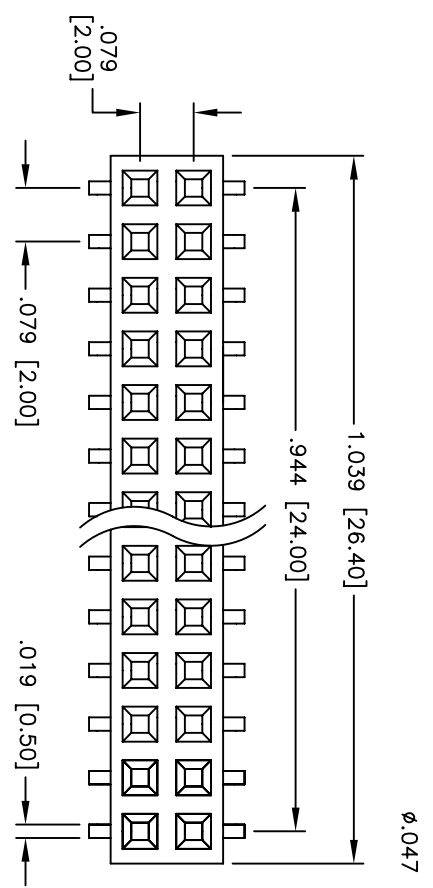

PACKAGED ON TAPE AND REEL

Positions: 02 thru 80
 A = .079 [2.00] x No. of Positions per Row
 B = .079 [2.00] x No. of Spaces

SPECIFICATIONS:

Material: Insulator: Nylon 6T, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze

Plating:

Gold Flash over Nickel underplate on mating area, Tin over Copper underplate on SMT tails

Electrical: Operating voltage: 250 VAC max.

Current rating: 1 Amp max.

Contact resistance: 20 mohms max. initial

Insulation resistance: 5,000 Mohms min.

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating: Operating temperature: -65°C to +125°C

Packaging:

Connectors supplied on Tape and Reel

Environmental:

Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 x .079 DUAL ROW RECEPTACLE STRIP
 .110 [2.80] HEIGHT, SURFACE MOUNT, T/R

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		HOLE SIZE	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XXX	± .015
.XXX	± .015	Ø.XXX	± .010
APPROVALS		DATE	
DRAWN	SS	6/18/07	
CHECKED			
APPROVED			
SIZE	PART NO.	SCALE:	REV.
X	2RS2T-XX-SG-SMT-T/R	NTS	-
REF:		SHEET	1 OF 1