Rev	AWO #	Description	Date	Appr
-		RELEASED	10/01/09	

APPROVED: _____

DATE: _____ TITLE: _____

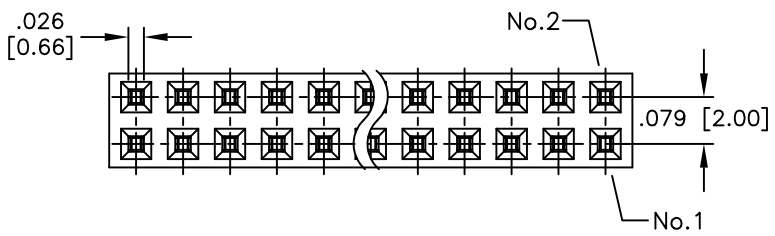

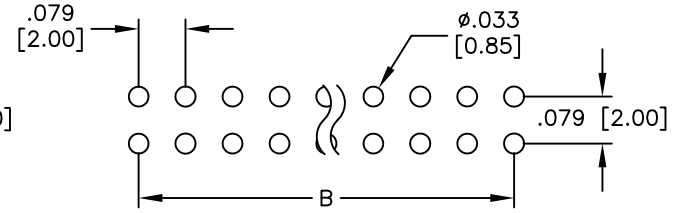

RECOMMENDED PCB LAYOUT

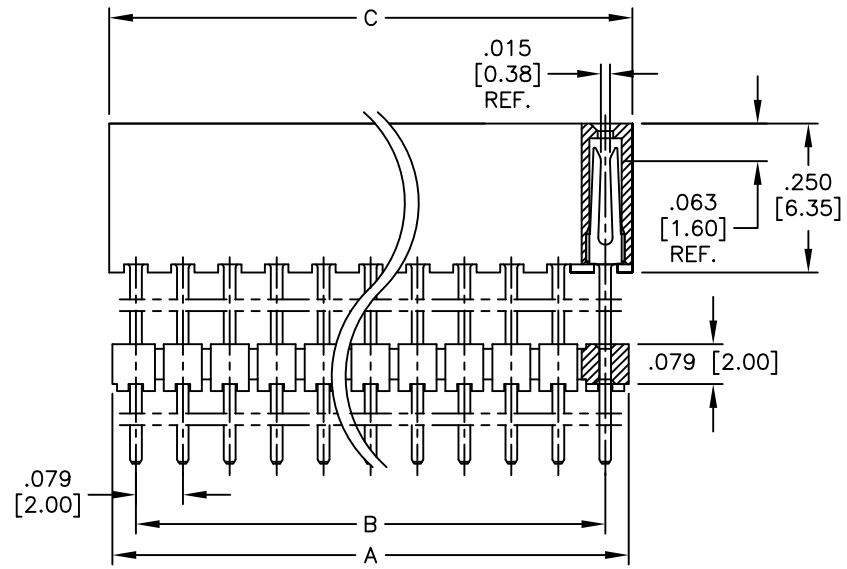

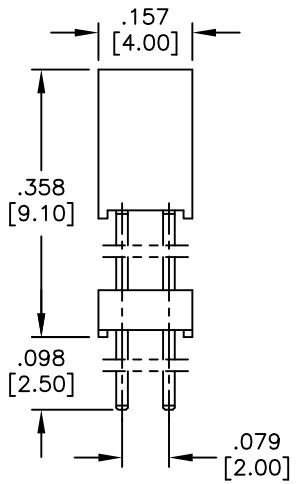

SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, rated UL 94V–0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate on contact area,
Tin over Copper underplate on tails
Electrical:
Current rating: 2 Amps max.
Contact resistance: 20 mohms max. initial
Insulation resistance: 1000 Mohms min.
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: –40°C to +105°C
Environmental:
Lead free, RoHS compliant
Recommended soldering temp: 235°C for 5 seconds

RoHS COMPLIANT

Positions: 02 thru 30
A = .079 [2.00] x No. of Positions per Row
B = .079 [2.00] x No. of Spaces
C = .079 [2.00] x No. of Positions per Row + .012 [0.30]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	10/01/09
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .200 x .200 DUAL ROW RECEPTACLE STRIP ELEVATED SOCKET, 1 INSULATORS

SIZE	PART NO.	REV.
X	2RSE2H-XX-SG-.098-.358	

REF: S00032T | SCALE: NTS | SHEET 1 OF 1