

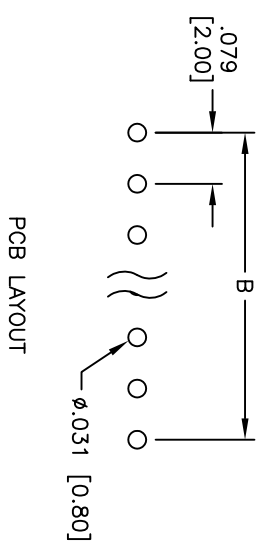
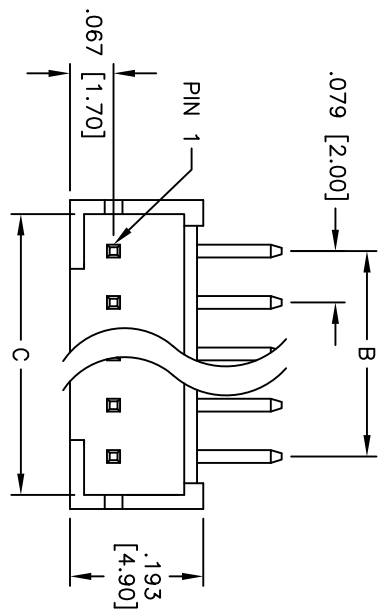


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/13/11	

APPROVED: _____
 DATE: _____ TITLE: _____

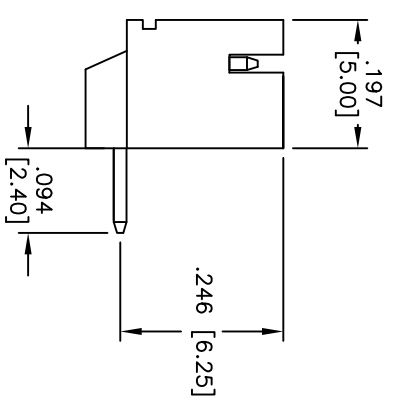

PCB LAYOUT

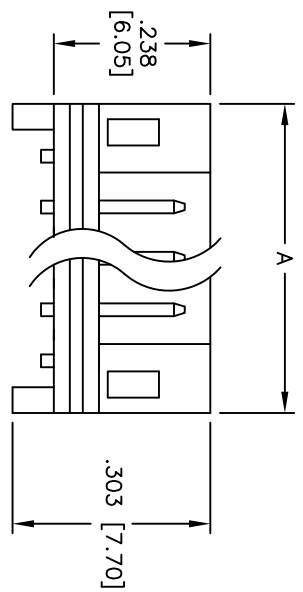

SPECIFICATIONS:

Material: Nylon 66, rated UL 94V-0
 Insulator color: White
 Contacts: Brass
 Plating: Matte Tin over Nickel underplate overall

Electrical:
 Operating voltage: 100 VAC max
 Current rating: 3 Amps max
 Contact resistance: 10 mohms max @ 500 VDC
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 800 VAC for 1 minute
 Temperature Rating: -25°C to +85°C



Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds

Positions: 2 thru 16
 A = .079 [2.00] x No. of Positions + .079 [2.00]
 B = .079 [2.00] x No. of Spaces
 C = .079 [2.00] x No. of Positions + .035 [0.90]

UNLESS OTHERWISE SPECIFIED		ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES:	EXCEPT AS NOTED		
.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS		DATE	
DRAWN	AY	1/13/11	
CHECKED	JL	1/13/11	
APPROVED			

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] SHRROUDED HEADER
 RIGHT ANGLE, PCB, MATTE TIN PLATED

SIZE	PART NO.	REV.
X	2SH-C-XX-MTR-NK-.094	-
REF:	S00163T	SHEET 1 OF 1