

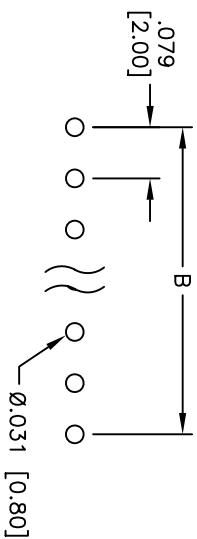
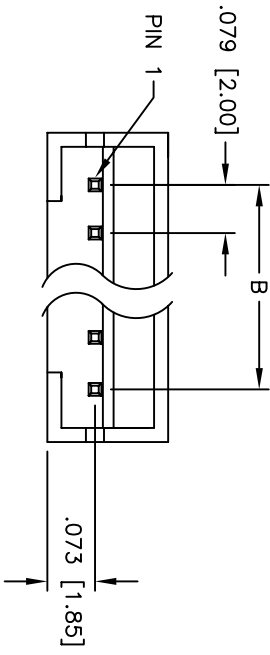


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/7/05	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

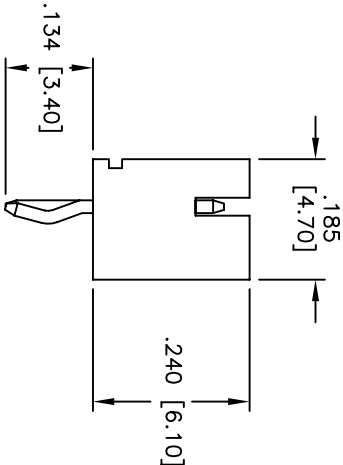

PCB LAYOUT

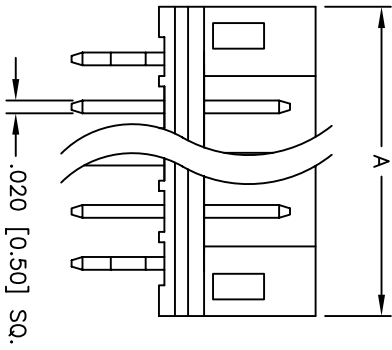

**SPECIFICATIONS:**

- Material: Nylon 66, rated UL 94V-0
- Insulator color: White
- Contacts: Brass
- Plating: Tin over Copper underplate overall
- Electrical:
  - Operating voltage: 100 VAC max
  - Current rating: 2 Amps max
  - Contact resistance: 10 mohms max
  - Insulation resistance: 1,000 Mohms min @ 500 VDC
  - Dielectric withstanding voltage: 1,000 VAC for 1 minute
- Temperature Rating:
  - Operating temperature: -25°C to +85°C
- Environmental:
  - Lead free, RoHS compliant
- Recommended soldering temp: 235°C for 5 seconds

Positions: 2 thru 15  
 A = .079 [2.00] x No. of Positions + .075 [1.90]  
 B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS: \_\_\_\_\_ DATE: \_\_\_\_\_

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] SHROUNDED HEADER  
 STRAIGHT, PCB

DRAWN	SS	4/7/05	SIZE	PART NO.	REV.
CHECKED			X	2SH-C-XX-TS	-
APPROVED			REF:	SCALE: NTS	SHEET 1 OF 1