


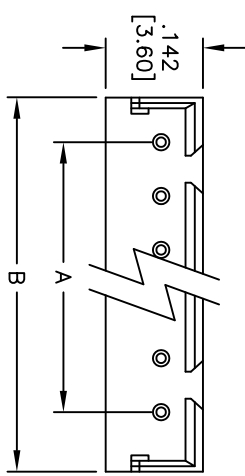




Rev	AWO #	Description	Date	Appr
-		RELEASED	11/09/09	

APPROVED: _____
 DATE: _____ TITLE: _____

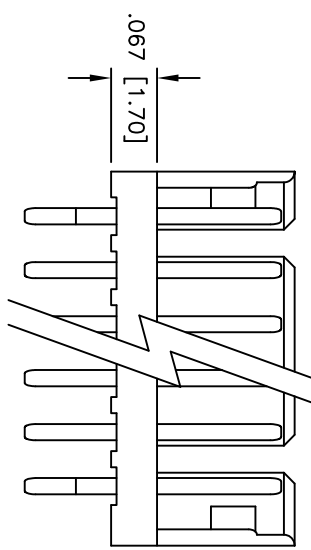

RECOMMENDED PCB LAYOUT



SPECIFICATIONS:

Material: Nylon 66, rated UL 94V-0
 Insulator color: White
 Contacts: Brass
 Plating: Tin over Copper underplate overall

Electrical:
 Operating voltage: 100 VAC max
 Current rating: 2 Amp max
 Contact resistance: 20 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 800 VAC for 1 minute
 Temperature Rating: Operating temperature: -25°C to +85°C



Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds

Positions: 2 thru 15
 A = .079 [2.00] x No. of Spaces
 B = .079 [2.00] x No. of Spaces + .152 [3.85]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS

DATE
11/09/09

DRAWN	DRY	11/09/09	SIZE	PART NO.	REV.
CHECKED			X	2SH-D1-XX-TS	-
APPROVED			REF: S000QT	SCALE: NTS	SHEET 1 OF 1

TITLE: .079 [2.00] SHROUNDED HEADER STRAIGHT, PCB

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710