
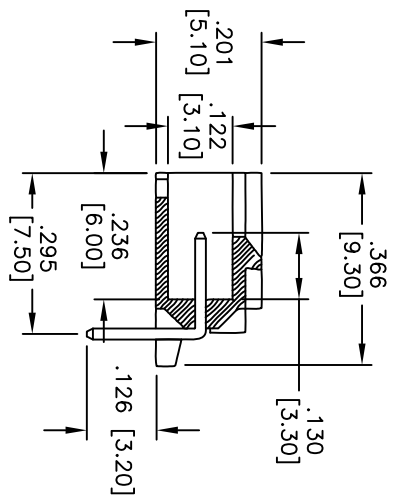
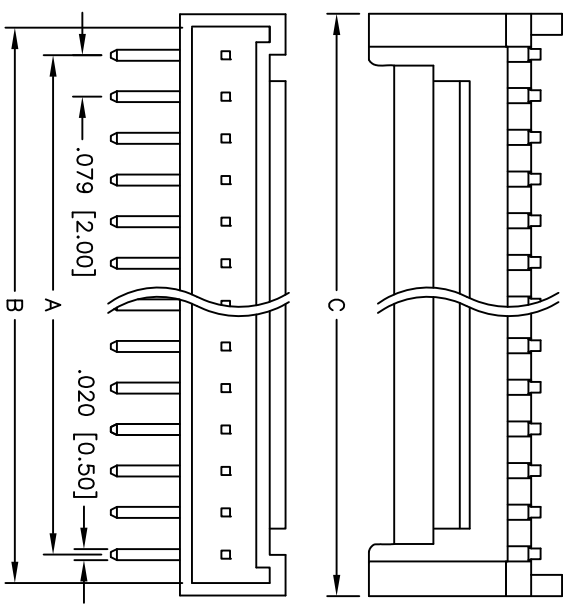


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/17/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

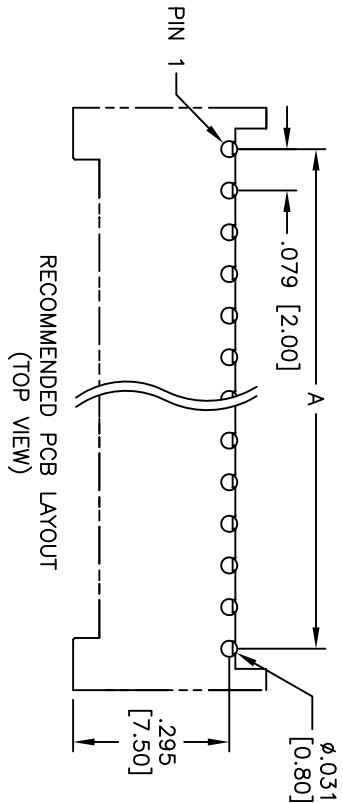

Positions: 2 thru 16  
 A = .079 [2.00] x No. of Spaces  
 B = .079 [2.00] x No. of Spaces + .108 [2.75]  
 C = .079 [2.00] x No. of Spaces + .157 [4.00]

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE IN INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES HOLEES [MM]

.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS

DRAWN	DY	11/17/10
CHECKED		
APPROVED		

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] SHRROUDED HEADER  
 RIGHT ANGLE, PCB, HALOGEN-FREE

SIZE	PART NO.	REV.
X	2SH-K-XX-MTR-HF	-
REF: S00123T	SCALE: NTS	SHEET 1 OF 1

**SPECIFICATIONS:**  
 Material: Insulator: Nylon 66, rated UL 94V-0  
 Insulator color: White  
 Contacts: Brass  
 Plating: Matt Tin over Nickel underplate overall  
 Electrical:  
 Operating voltage: 250V AC/DC  
 Current rating: 3A AC/DC  
 Contact resistance: 30 mohms max  
 Insulation resistance: 1,000 Mohms min  
 Dielectric withstanding voltage: 1000 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -25°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant  
 Recommended soldering temp: 235°C for 5 seconds

