Rev	AWO #	Description	Date	Appr
-		RELEASED	1/13/11	

APPROVED: _____

DATE: _____ TITLE: _____

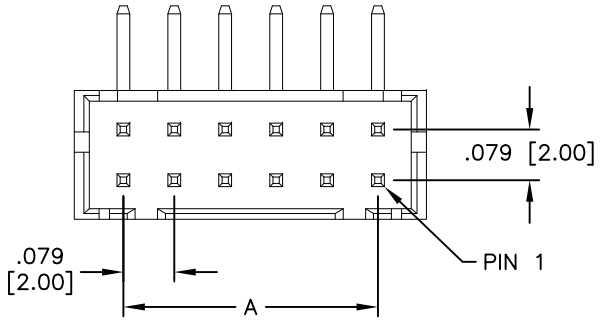

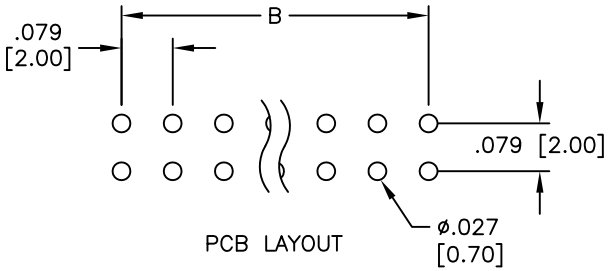

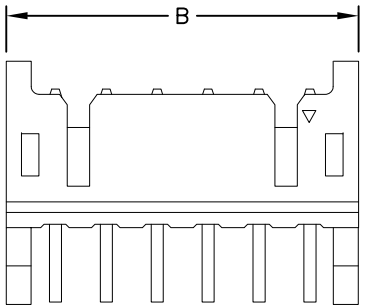

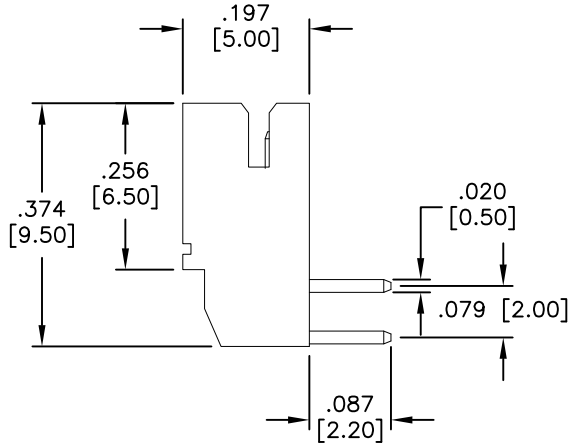

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-0
Insulator color: Natural
Contacts: Brass
Plating:
Matte Tin over Nickel underplate overall
Electrical:
Operating voltage: 100 VAC max
Current rating: 3 Amps max
Contact resistance: 10 mohms max
Insulation resistance: 1,000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 800 VAC for 1 minute
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS compliant
Recommended soldering temp: 235°C for 5 seconds

RoHS COMPLIANT

Positions: 6 thru 40
A = .079 [2.00] x No. of Spaces
B = .079 [2.00] x No. of Spaces + .157 [4.00]
B = .079 [2.00] x No. of Spaces + .108 [2.74]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	1/13/11
CHECKED	JL	1/13/11
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] DOUBLE ROW, SHROUDED HEADER, RIGHT ANGLE, PCB

SIZE	PART NO.	REV.
X	2SHD-C-XX-MTR-.087	-

REF: | SCALE: NTS | SHEET 1 OF 1