
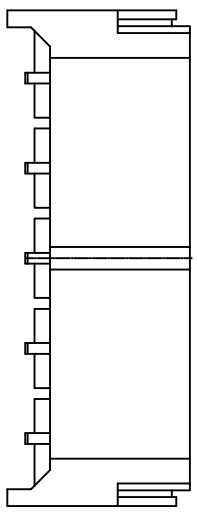
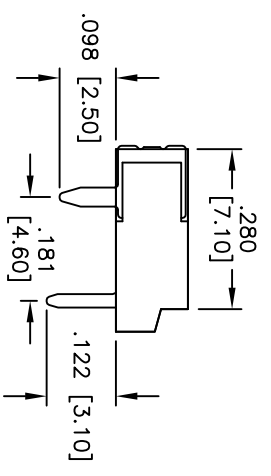
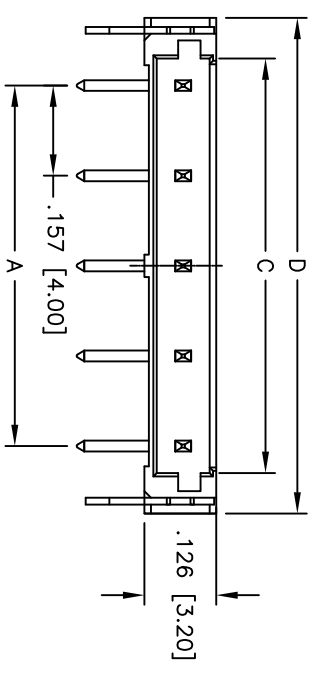


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/03/10	

APPROVED: _____
 DATE: _____ TITLE: _____

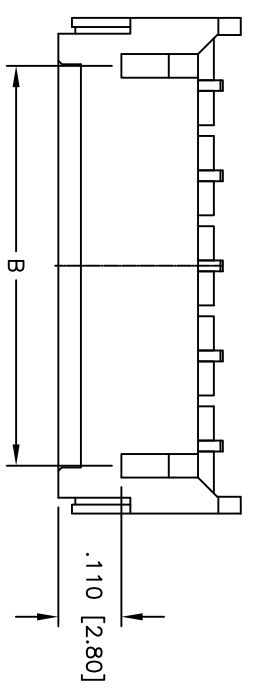

Positions: 02 thru 05
 A = .157 [4.00] x No. of Spaces + .071 [1.80]
 B = .157 [4.00] x No. of Spaces + .094 [2.40]
 C = .157 [4.00] x No. of Spaces + .236 [6.00]
 D = .157 [4.00] x No. of Spaces

SPECIFICATIONS:
 Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Natural
 Contacts: Brass
 Plating: Matt Tin over Nickel underplate overall
 Temperature Rating: -25°C to +85°C
 Operating temperature: -25°C to +85°C
 Environmental: Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN DY	11/03/10
CHECKED	
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .157 [4.00] SHROUDED HEADER
 RIGHT ANGLE, PCB TYPE, HALOGEN-FREE

SIZE	PART NO.	REV.
X	4SH-A-XX-MTR-V0-HF	-
REF: S0063T	SCALE: NTS	SHEET 1 OF 1