

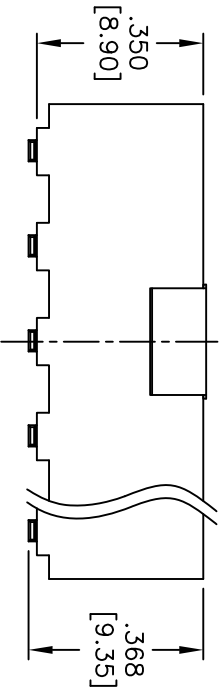
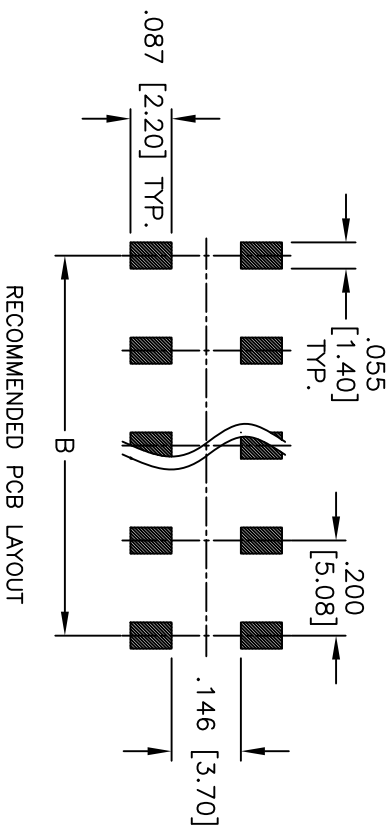


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/17/10	

APPROVED: _____
 DATE: _____ TITLE: _____

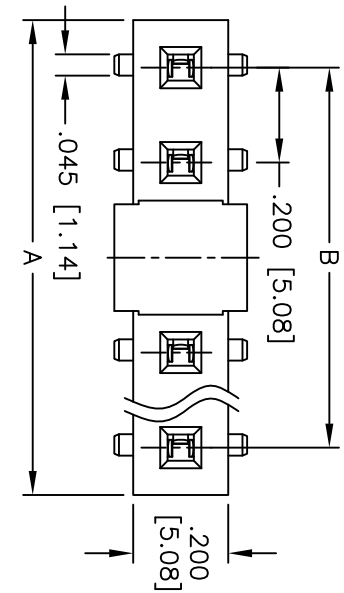

SPECIFICATIONS:

Material:

Insulator: LCP, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze

Plating:

Matt Tin over Nickel underplate overall

Electrical:

Operating voltage: 150 VAC max
 Current rating: 1 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 5000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.



PCAKAGED ON TAPE & REEL

A = .200 [5.08] x No. of Positions
 B = .200 [5.08] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES: .X ±.10 ØXX ±.015
 .XXX ±.020 ØXXX ±.010

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS	DATE	TITLE	SIZE	PART NO.	SCALE	SHEET	REV.
DRAWN	DY	8/17/10	X	5.08R31-XX-MT-SMT-PP-T/R	MIS	1 OF 1	-
CHECKED							
APPROVED							