

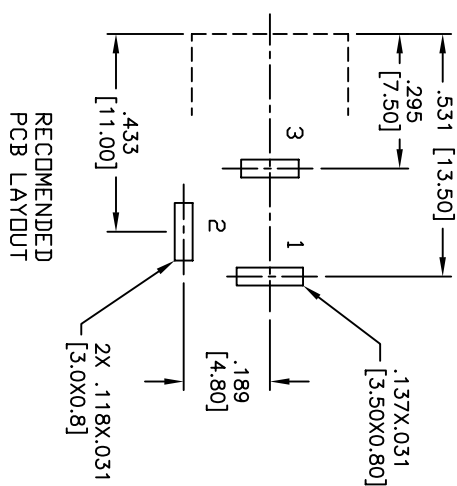
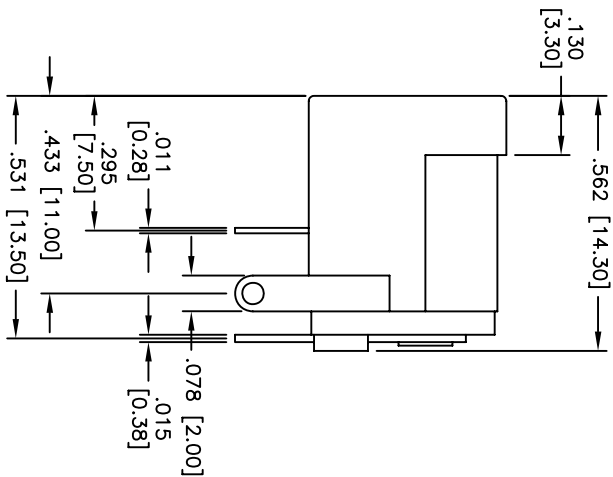


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/21/06	

APPROVED: _____
 DATE: _____ TITLE: _____

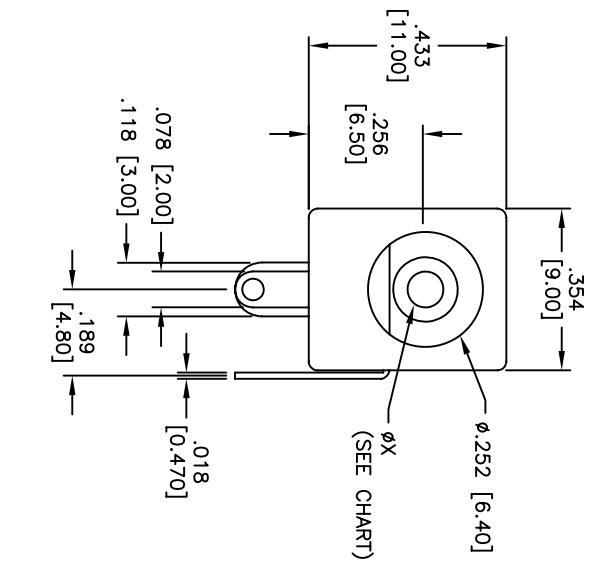

PART NO.	CENTER PIN DIA.
ADC-002-1-HT	.078 [2.00]
ADC-002-2-HT	.098 [2.50]
ADC-002-5-HT	.092 [2.35]
ADC-002-9-HT	.065 [1.65]

SPECIFICATIONS:
 Material: Insulator: Nylon 6T, rated UL 94V-0
 Insulator color: Black
 Center Pin: Brass, Nickel plated
 Contacts: Copper Alloy
 Plating: Silver over Nickel underplate
 Electrical: Operating voltage: 12 VDC max.
 Current rating: 1 Amp max.
 Contact resistance: 30 mohms max. initial
 Insulation resistance: 50 Mohms min.
 Dielectric withstanding voltage: 250 VAC for 1 minute
 Temperature Rating: Operating temperature: -25°C to +85°C
 Environmental: Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

DC POWER JACK, HI TEMP

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		HOLDS	
.X	± .10	ØX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS	DATE	TITLE	
DRAWN	SS	7/21/06	
CHECKED		SIZE	
APPROVED		X	
PART NO.		ADC-002-X-HT	
REF:		SCALE: NTS	
SHEET 1 OF 1		REV.	