Rev	AWO #	Description	Date	Appr
-		RELEASED	5/10/10	

APPROVED: _____

DATE: _____ TITLE: _____

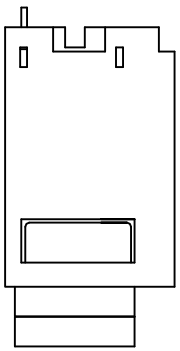

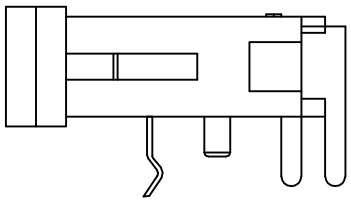

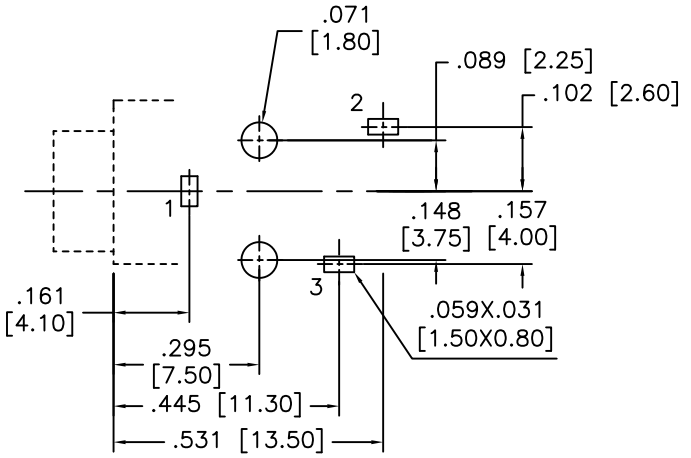

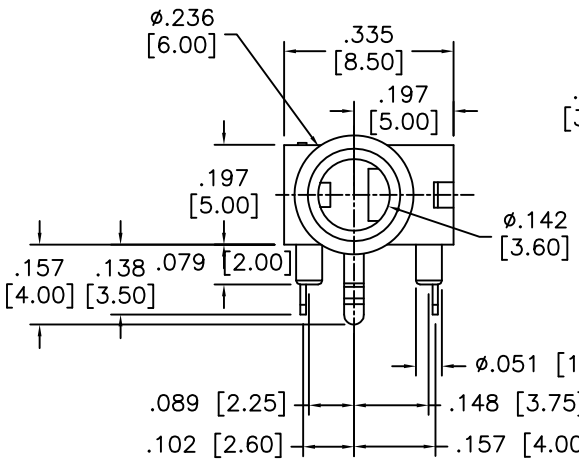

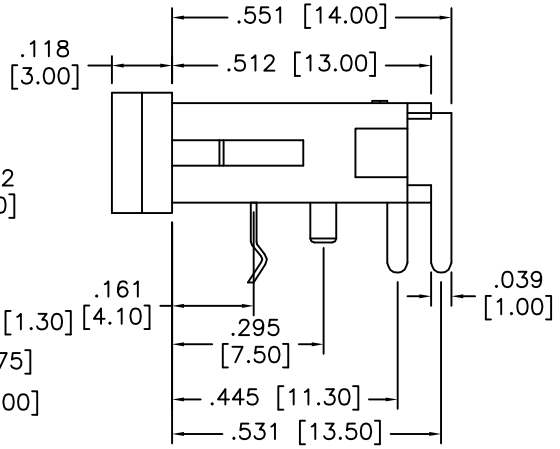



CIRCUIT DIAGRAM

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V–0

Insulator color: Black

Contacts: Phosphor Bronze, Matte Tin plated.

Electrical:

Operating voltage: 30 VDC max.

Current rating: 0.5 Amp max.

Contact resistance: 50 mohms max.

Insulation resistance: 100 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: –25°C to +85°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	5/10/10
CHECKED		
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE: STEREO PHONE JACK

SIZE	PART NO.	REV.
X	ASJ-126-3	-

REF:	SCALE:	SHEET
S00030C	NTS	1 OF 1