

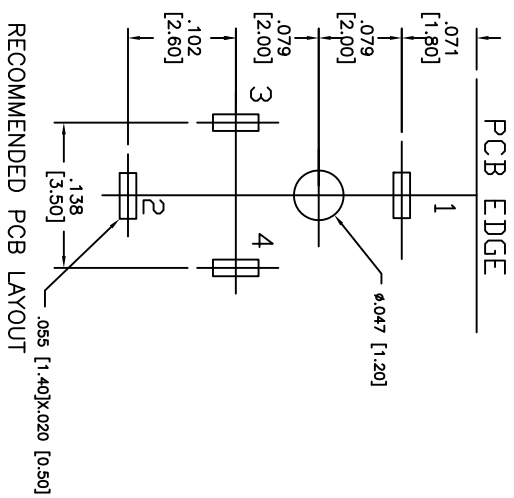


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/15/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

1.4131

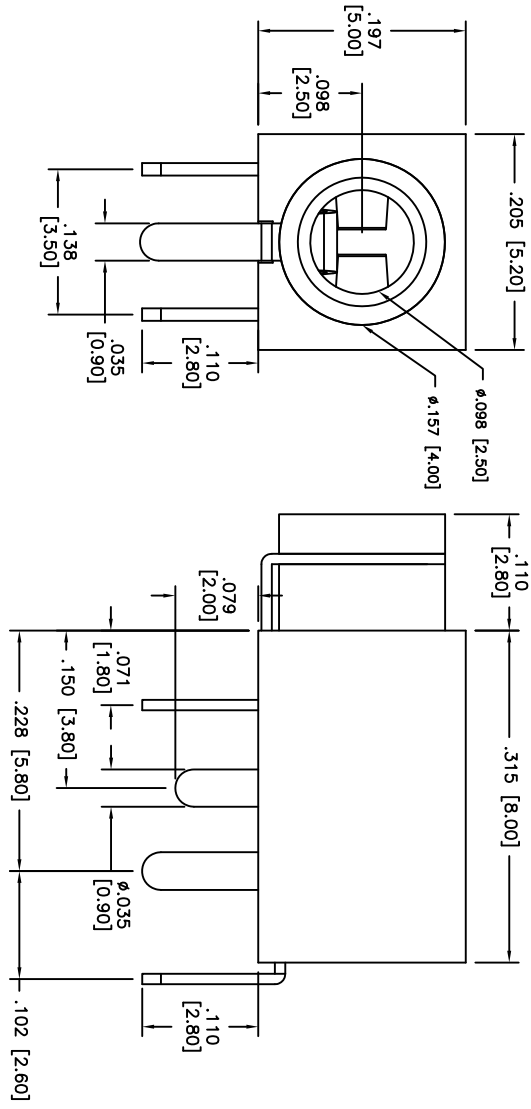

SPECIFICATIONS:  
 Material: Insulator: PBT, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Phosphor Bronze, Tin plated.

Electrical:  
 Operating voltage: 30 VDC max.  
 Rated Voltage And Current: DC 12V, 2A Max  
 AC 100V, 1A Max

Contact resistance: 30 mohms max.  
 Insulation resistance: 100 Mohms min.  
 Dielectric withstanding voltage: 500 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -20°C to +70°C

Environmental:  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 235°C for 5 sec.



**ADAM TECH**

909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

STEREO PHONE JACK, 3.5mm

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		HOLE SIZE		DATE	
.X	± .10	ØX	± .10				
.XX	± .020	ØXX	± .015				
.XXX	± .015	ØXXX	± .010				
APPROVALS		DATE		TITLE		REV.	
DRAWN	AY	9/15/10		STEREO PHONE JACK, 3.5mm		-	
CHECKED	VW	9/15/10		ASL-1344C		-	
APPROVED				REF: S00140T		-	