

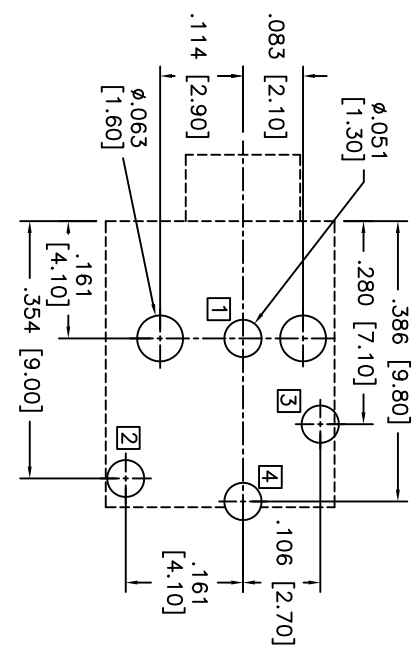
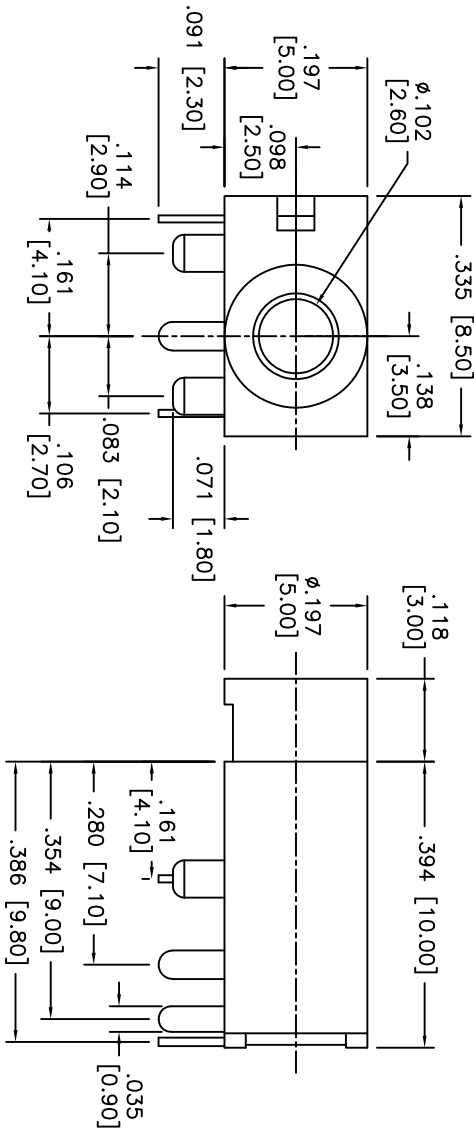


| Rev | AWO # | Description | Date | Appr |
|-----|-------|-------------|---------|------|
| - | 11434 | RELEASED | 6/16/11 | |

APPROVED: _____
 DATE: _____ TITLE: _____



RECOMMENDED PCB LAYOUT
(COPPER-SIDE VIEW)

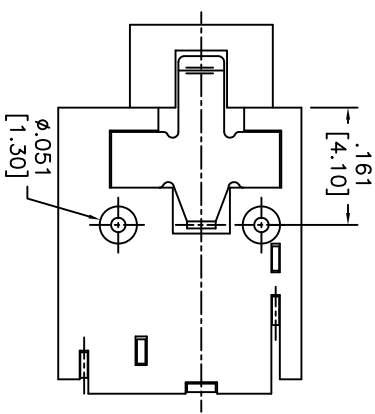

SPECIFICATIONS:

Material: Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy, Tin plated.
 Electrical: Rated Voltage and Current: DC30V, 0.5A.
 Contact resistance: 30 mohms max.
 Insulation resistance: 100 Mohms min. @ DC250V
 Withstanding voltage: 500 VAC
 Environmental: Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



| | |
|--|--------------|
| UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] | |
| TOLERANCES: EXCEPT AS NOTED | |
| INCHES | HOLDS |
| .X ± .10 | ØXX ± .10 |
| .XX ± .020 | ØXXX ± .015 |
| .XXX ± .015 | ØXXXX ± .010 |
| APPROVALS | DATE |
| DRAWN | DY |
| CHECKED | |
| APPROVED | |
| | 6/16/11 |

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

| | | | |
|-----------------------|------------|--------------|------|
| TITLE | SIZE | PART NO. | REV. |
| 2.5 STEREO PHONE JACK | X | ASJ-44-3A | - |
| REF: S0002C | SCALE: NTS | SHEET 1 OF 1 | |