


6	5	4	3	2	1
APPROVED: _____	TITLE: _____	DATE: _____			
Rev	AWO #	Description	Date	Appr	
-		RELEASED	11/25/10		

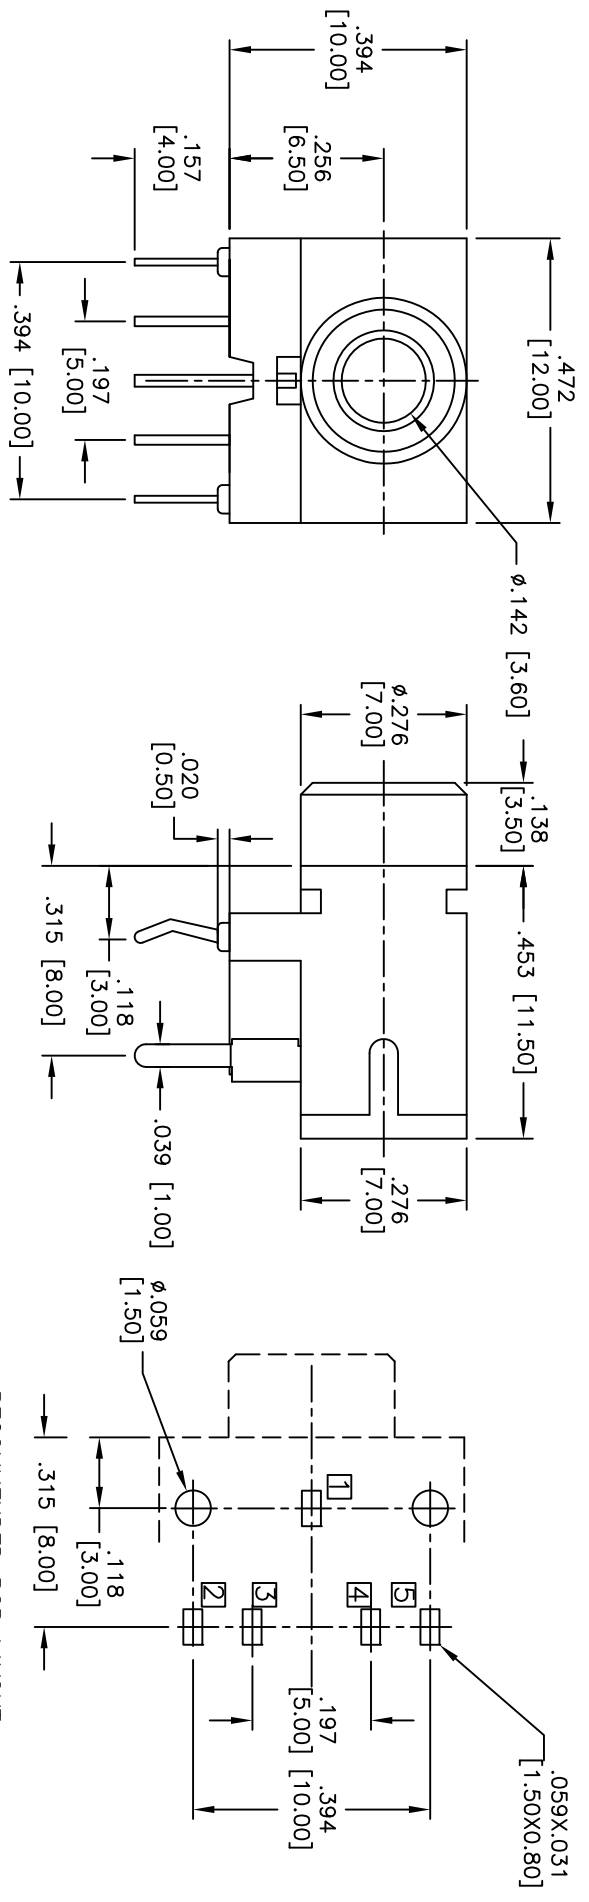

CONTACT FORM	ASJ-6-5-NK	ASJ-6-4B-NK	ASJ-6-3A-NK	ASJ-6-3-NK
SCHEMATIC				

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material: Insulator: PBT, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy, Tin plated.
 Electrical:
 Operating voltage: 30 VDC max.
 Current rating: 0.5 Amp max.
 Contact resistance: 30 mohms max.
 Insulation resistance: 100 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -20°C to +70°C
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: STEREO PHONE JACK, 3.5mm

SIZE	PART NO.	REV.
X	ASJ-6-XX-NK	
REF: S0002C	SCALE: NTS	SHEET 1 OF 1